



**716MR-SCF12-D01**

7-16 DIN Male Connector for 1/2" Coaxial Cable, OMNI FIT™ Premium, Right Angle, threaded gasket and 360° compression sealing



OMNI FIT™ Premium Connectors

OMNI FIT™ high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminium) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment.

All RFS Technologies connectors are fully tested for mechanical and electrical compliance to industry specifications.

The 7-16 connector is the most rugged RF connection meeting all requirements even under the most severe environmental conditions. Sealing against outer conductor and jacket by means of threaded gasket and 360° compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket.

**FEATURES / BENEFITS**

- Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction
- Two-piece design i.e. visual inspection of interlocking leads to improved installation security
- OMNI FIT™ concept i.e. streamlined order management and reduced stock level
- Watertight sealing in mated and unmated condition, i.e. reduced efforts during installation and improved security during operation
- Unique NiTin plating i.e. extreme resistance against corrosion even under hardest climatic and environmental circumstances
- Multi-thread (Tristart) design i.e. simplified and accelerated tightening process
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis

**Technical features**

**GENERAL SPECIFICATIONS**

<b>Transmission Line Type</b>		Coaxial Cable
<b>Cable Size</b>		1/2
<b>Cable Type</b>		Foam Dielectric Superflexible
<b>Model Series</b>		SCF12-50 Series
<b>Connector Interface</b>		7-16 DIN
<b>Connector Type</b>		OMNI FIT™ PREMIUM Right Angle
<b>Sealing Method</b>		Threaded Gasket + 360° Compression
<b>Gender</b>		Male

**ELECTRICAL SPECIFICATIONS**

<b>Nominal Impedance, ohms</b>	Ohm	50
<b>3rd Order IM Product @ 2x20 Watts</b>	dBc	-163 ; typical -167
<b>Maximum Frequency</b>	GHz	3.7
<b>VSWR, Return Loss</b>	VSWR (dB)	0 &lt; f ≤ 1.0 GHz: 1.03 (36.6) 1.0 &lt; f ≤ 2.2 GHz: 1.04 (34.2) 2.2 &lt; f ≤ 2.7 GHz: 1.06 (30.7) 2.7 &lt; f ≤ 3.7 GHz: 1.13 (24.3)

**716MR-SCF12-D01**

7-16 DIN Male Connector for 1/2" Coaxial Cable, OMNI FIT™ Premium,  
Right Angle, threaded gasket and 360° compression sealing

**MECHANICAL SPECIFICATIONS**


Plating Outer/Inner		NiTin/Silver
Length	mm (in)	67 (2.64)
Outer Diameter	mm (in)	42.7 (1.68)
Inner Contact Attachment		Spring Finger
Outer Contact Attachment		360° clamping

**ACCESSORIES**

Wrench size front	mm (in)	22 (7/8)
Wrench size rear	mm (in)	18 (7/10)

**TESTING AND ENVIRONMENTAL**

Waterproof Level		IP68
------------------	--	------

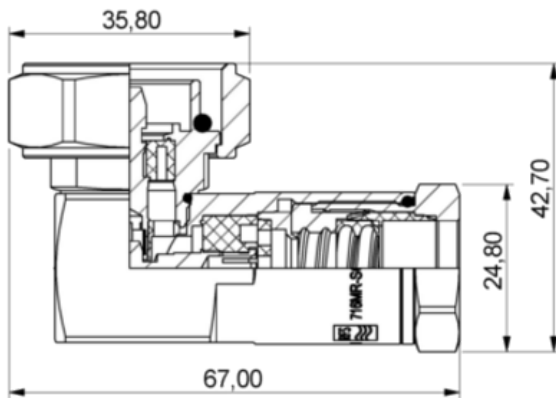

[External Document Links](#)  
[Installation Instruction](#)

[Notes](#)