PRODUCT DATASHEET


CC-12-2

Clic clamp for RADIAFLEX® 1/2" (for ALF, RCF RLK)

Clic Clamp, 1/2" ALF,RCF,RLK polyamide black, halogen free
fire class UL94HB

FEATURES / BENEFITS

Safe and efficient installation of RADIAFLEX® cable with clic-clamps. Simple mounting by using wall plugs and screws. Simply push in by hand, clamp will grip and lock by applying slight pressure.

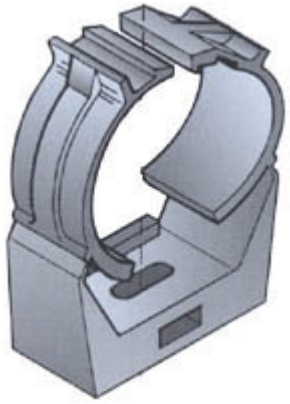

clic_clamp_TI

Technical features

GENERAL SPECIFICATIONS

Product Line		Radiating Cable Accessories
Product Type		Hanger
Hanger Type		Clic clamp
Transmission Line Type		ALFU RLK* RCF12-50*A HCA12-50 RHCA12-50
Cable Type		Air Dielectric Radiating Cable
Color		Black

MECHANICAL SPECIFICATIONS

Cable Size		1/2
Number of Cable / Waveguide Runs		1
Material		Polyamide

TESTING AND ENVIRONMENTAL

Fire Class		UL94 HB

TEMPERATURE SPECIFICATIONS

Installation Temperature	°C (°F)	-20 to 80 (-4 to 176)
Operation Temperature	°C (°F)	-50 to 85 (-58 to 185)
Storage Temperature	°C (°F)	-50 to 85 (-58 to 185)


PACKAGING INFORMATION

Package Quantity		500

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

CC-12-2


Clic clamp for RADIAFLEX® 1/2" (for ALF, RCF RLK)

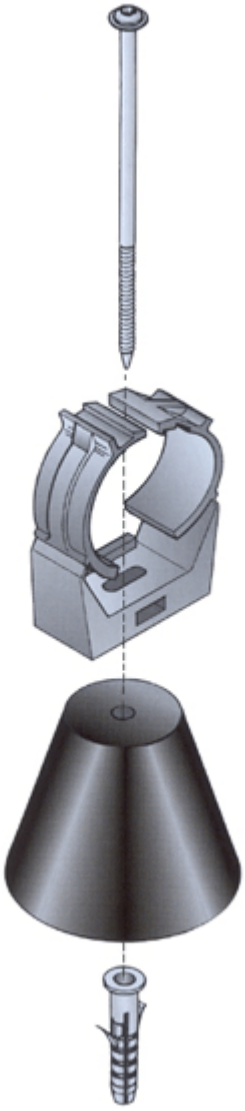

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

CC-12-2

Clic clamp for RADIAFLEX® 1/2" (for ALF, RCF RLK)

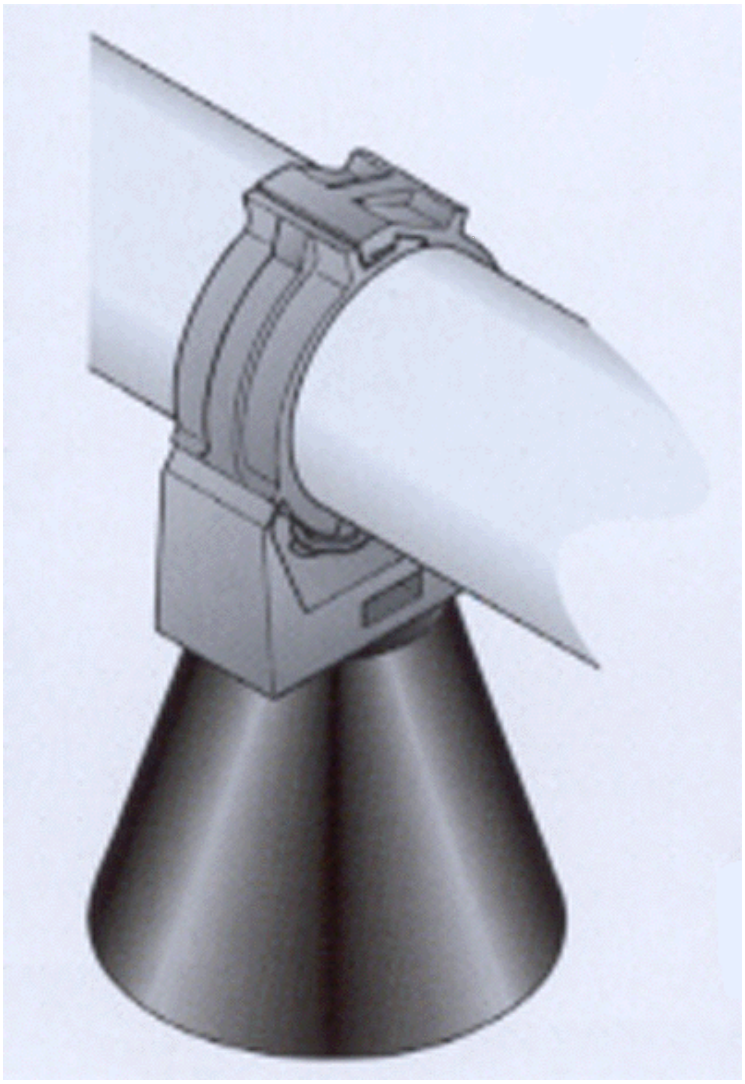

External Document Links

Notes

* valid for all cable versions

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering