

Cold shrink tube, 1/2" to 1/2", 1/2" to 5/8", 5/8" to 5/8"

RFS cold shrink tubes provide a additional sealing of feeder connections.

With the included foam strips a sealing class IP68 is guaranteed even with scratches on the jacket surface.

The materials are selected for a long-term outdoor use.

FEATURES / BENEFITS

- RFS offers a timesaving and easy way to secure a waterproof protection.
- · No tools are necessary for installation.
- The shrinking process is done by simply unwinding a removable core.



External Document Links		
Installation Instruction		

Technical features

~ I	'nι	 	ĸ	-
J :	110		1	

Product Line	Coaxial Cable Accessories		
Product Type	Weather Seal Kit		
Coaxial Cable Type	Foam Dielectric		

MECHANICAL SPECIFICATIONS

Mated to Cable Size and Interface		1/2" to 1/2", 1/2" to 5/8", 5/8" to 5/8", up to and including 7-16 DIN connectors		
Color		Black		
Material		Cold shrink tube: Made of EPDM rubber Foam strips: Made of self bonding Foam PE		
Sealing Class		IP68		
Length	mm (in)	254 (10)		

TEMPERATURE SPECIFICATIONS

Operation Temperature, °C°F)	°C(°F)	-50 to 100 (-58 to 212)
Storage Temperature	°C(°F)	-50 to 100 (-58 to 212)


PACKAGING INFORMATION

Package Quantity	1	

COLD-020 REV : G REV DATE : 21 Oct 2020 www.rfstechnologies.com



Cold shrink tube, 1/2" to 1/2", 1/2" to 5/8", 5/8" to 5/8"

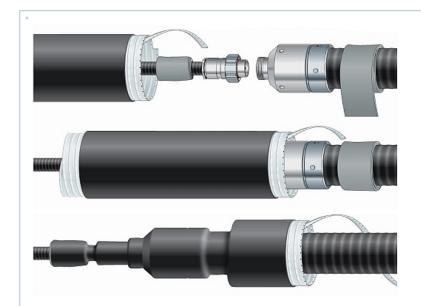

COLD-020 REV : G REV DATE : 21 Oct 2020 www.rfstechnologies.com