



**FDX55020D4-2C**

ShareLite™ 80 - 2690MHz / 3300 - 5925 MHz Diplexer, with DC Pass 80-2690, Dual Configuration, 4.3-10 Connectors

The ShareLite FDX5 family of diplexers enable feeder sharing between systems in the 80 - 2690 MHz spectrum for Path 1 and 3300 - 5925 MHz (CBRS/LAA) spectrum for Path 2. The innovative design delivers very low insertion loss in an extremely small and lightweight envelope. Selective filters guarantee 50 dB of isolation between ports for an interference free deployment in any environment. An IP67 housing design protects against the most severe outdoor installation with a vented enclosure to eliminate condensation and pressure instability. The result is a long lasting solution with exceptional reliability.

**FEATURES / BENEFITS**

- Exceptionally compact design, very small footprint
- Dual unit (4:2)
- DC pass 80-2690 (Path 1)
- 4.3-10 connectors
- Extremely Low Insertion Loss
- High power handling capability
- High level of Rejection between bands - Protection against interference
- Superb environmental protection (IP-67)
- Mounting hardware for Wall and Pole mount provided



**Technical features**

**GENERAL SPECIFICATIONS**

<b>Product Type</b>		Diplexer/Cross Band Combiner
<b>Application</b>		Tetra, LTE700, LTE800, GSM900, 1500 L Band (LTE Band 32), GSM1800, LTE1800, PCS, UMTS, AWS, LTE2100, LTE2300, WCS, BRS, LTE2600, CBRS, LAA, 3.5GHz, Band 42, Band 43
<b>Configuration</b>		Dual (4:2), Outdoor/indoor

**ELECTRICAL SPECIFICATIONS**

<b>Branch</b>		1, 2
<b>Frequency Range</b>	MHz	80-2690      3300-5925
<b>Impedance</b>	Ohms	50
<b>Frequency Band</b>		Tetra, LTE700, LTE800, GSM900, 1500 L Band (LTE Band 32), GSM1800, LTE1800, PCS, UMTS, AWS, LTE2100, LTE2300, WCS, BRS, LTE2600, CBRS, LAA, 3.5GHz, Band 42, Band 43
<b>DC Pass</b>		DC pass 80-2690 (Path 1)
<b>Insertion Loss</b>	dB	0.1 typ, 0.3 max, 0.2 typ, 0.5 max
<b>Return Loss</b>	dB	19 min / 22 typ., 16 min / 22 typ
<b>Power Handling Continuous, Max.</b>	W	160
<b>Input Power, PEP</b>	W	3000
<b>Rejection between bands</b>	dB	50
<b>3rd Order PIM</b>	dBm (dBc)	-118 (-158) @ 2 x 43



**FDFX55020D4-2C**


ShareLite™ 80 - 2690MHz / 3300 - 5925 MHz Diplexer, with DC Pass 80-2690, Dual Configuration, 4.3-10 Connectors

**TESTING AND ENVIRONMENTAL**

Temperature Range	°C (°F)	-40 to 65 (-40 to 149)
Ingress Protection		IP 67
Environmental		ETSI 300-019-2-4 Class 4.1E
Lightning Protection		EN/IEC61000-4-5 Level 4

**MECHANICAL SPECIFICATIONS**

RF Connectors		4.3-10 Female; 4 ports in, 2 ports out
Weight	kg (lb)	1.2 (2.65)
Shipping Weight	kg (lb)	2.26 (4.98)
Dimensions, H x W x D	mm (in)	152 x 79 x 79 (6.0 x 3.1 x 3.1)
Shipping Dimensions, H x W x D	mm (in)	251 x 172 x 227 (9.9 x 6.8 x 8.9)
Mounting		Wall Mounting: With 2 screws (maximum 6mm diameter) Pole Mounting: With included clamp set 38-127mm (1.50-5.0")

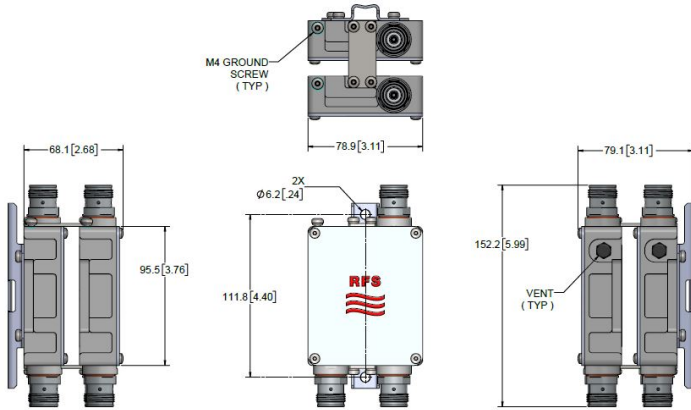

[External Document Links](#)

Notes