




HYBRIFLEX fiber only round drop cable, simplex single mode, gel free, water blocking, LSZH, indoor cable with integrated rip cord. Optimized for Radio over Fiber (RoF) applications, for use within the RFS Technologies "Conventional" RoF solution.

FEATURES / BENEFITS

- Incorporates simplex, single mode optical fiber ensuring future proof connectivity for RoF (and other) high bandwidth, multi wavelength applications
- Tight buffer fibers are housed in high-modulus plastic and with water-blocking yarn around
- Aramid and water blocking glass-fiber yarns are applied as strength member
- High quality raw material guarantees the long service life of cable
- Flame retardant, LSZH materials for use inside buildings
- Integrated rip cord

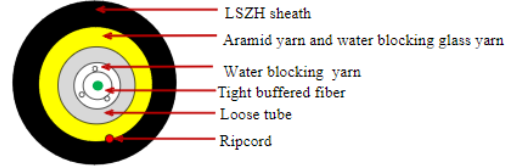

Technical features

STRUCTURE

Cable Type		Fiber optic cable
Fire Performance		Flame Retardant
Optical Fiber Color		Green
Number of Fiber		1

MECHANICAL SPECIFICATIONS

Cable Weight	kg/m (lb/ft)	0.03 (0.02)
---------------------	--------------	-------------

CABLE JACKET

UV-Protection Individual and External Jacket		Yes for External Jacket Only
Jacket Material		LSZH Black
Outer Diameter Nominal	mm (in)	5.05 (0.199)

F/O CABLE SPECIFICATIONS

F/O Cable Type		G657-A2 Single Mode, Bend Tolerant
Core/Clad	µm	9 /125
Secondary Protection Nominal	µm (in)	240 (0.009)
Single Bending Radius	mm (in)	10 (0.394)
F/O Standards (Meets or Exceeds)		ITU-T G657A2; RoHS Compliant
Fiber Attenuation		Max: ≤ 0.37dB/km@λ=1310nm & ≤0.24dB/km λ =1550nm
Zero Dispersion Slope		≤0.092 ps/km nm ²
Dispersion (1285 - 1340 nm)		-3.5 ~ 3.5ps/(nm km)
Mode Field Diameter (@ 1310 nm)		8.8
Cutoff wavelength cable		≤1260 nm

TESTING AND ENVIRONMENTAL

Storage Temperature	°C (°F)	-40 to 70 (-40 to 158)
Operation Temperature	°C (°F)	-25 to 65 (-13 to 149)
Installation Temperature	°C (°F)	-5 to 60 (23 to 140)
LSZH Specification		IEC 60332-1



PRODUCT DATASHEET

FOGT-01x01SA2-F00

HYBRIFLEX® Fiber Optic Drop Cable, Simplex, Single Mode, LSZH, Indoor

External Document Links

Notes