



**FOJBF-OSFP01S-010M**

HYBRIFLEX® Optical Fiber Cabling Solution, 1 Pair Armored Bend-Insensitive Single-Mode Fiber with ODC to DLC/SFP Connectors, 10 m

**PRODUCT DESCRIPTION**

RFS' HYBRIFLEX Remote Radio Head (RRH) hybrid feeder cabling solution combines any combination of optical fiber and/or DC power for RRHs in a single lightweight armored or unarmored cable, making it the world's most innovative solution for RRH deployments. Hybrid, Fiber Optic and DC riser trunk and jumper cables are available in a large variety of fiber counts, DC counts and cross sections. Both pre-connectorized and on-site options are available.



**FEATURES / BENEFITS**

- Armored, bend-insensitive fiber design with outstanding bending characteristics – Eases installation and provides long-term reliability
- Lightweight solution and compact design – Decreases tower loading
- Robust cabling – Eliminates need for expensive cable trays and ducts
- Indoor/Outdoor, black PVC jacket – Ensures long-lasting cable protection
- **100% Factory tested - Online test results available**

**TECHNICAL FEATURES**

**STRUCTURE**

|                         |        |                 |
|-------------------------|--------|-----------------|
| <b>Cable Type</b>       |        | HYBRIFLEX®      |
| <b>Fire Performance</b> |        | Flame Retardant |
| <b>Length</b>           | m (ft) | 10 (32.8)       |

**MECHANICAL SPECIFICATIONS**

|   |              |                    |
|---|--------------|--------------------|
| <b>Outer Diameter Nominal</b>                 | mm (in)      | 4.8 (0.189)        |
| <b>Cable Weight</b>                           | kg/m (lb/ft) | 0.035 (0.023)      |
| <b>Minimum Bending Radius, Single Bend</b>    | mm (in)      | 50 (1.97)          |
| <b>Minimum Bending Radius, Multiple Bends</b> | mm (in)      | 75 (2.95)          |
| <b>Recommended / Maximum Clamp Spacing</b>    | m (ft)       | 1 / 1.2 (3.25 / 4) |

**F/O CABLE SPECIFICATIONS**

|   |         |                                    |
|---|---------|------------------------------------|
| <b>Number of F/O Pairs</b>              |         | 1                                  |
| <b>F/O Cable Type</b>                   |         | G657-A1 Single Mode, Bend Tolerant |
| <b>Core/Clad</b>                        | µm      | 9/125                              |
| <b>Secondary Protection Nominal</b>     | µm (in) | 900 (0.035)                        |
| <b>F/O Standards (Meets or Exceeds)</b> |         | RoHS Compliant                     |
| <b>Optical Loss</b>                     | dB/Km   | 0.5 @ 1310 nm<br>0.5 @ 1550 nm     |
| <b>Fiber Termination End 1</b>          |         | ODC socket                         |
| <b>Fiber Termination End 2</b>          |         | DLC/SFP Connector                  |



**FOJBF-OSFP01S-010M**

HYBRIFLEX® Optical Fiber Cabling Solution, 1 Pair Armored Bend-Insensitive Single-Mode Fiber with ODC to DLC/SFP Connectors, 10 m

**CABLE JACKET**

|  |         |  |
|--|---------|--|
| UV-Protection Individual and External Jacket |         | Yes  |
| Jacket Material                              |         | Flame Retardant, Indoor/Outdoor, Black, LSZH |
| Armor Type                                   |         | Metal Armored Tube                           |
| Diameter Corrugated Armor                    | mm (in) | 2.8 (0.11)                                   |

**TESTING AND ENVIRONMENTAL**


|                          |         |                        |
|--------------------------|---------|------------------------|
| Storage Temperature      | °C (°F) | -40 to 70 (-40 to 158) |
| Operation Temperature    | °C (°F) | -40 to 65 (-40 to 149) |
| Installation Temperature | °C (°F) | -20 to 65 (-4 to 149)  |

**EXTERNAL DOCUMENT LINKS**

Installation Guidelines: [Download](#)  
 On-line Factory Test Results: [View](#)

**NOTES**

Optimized for Nokia RRH

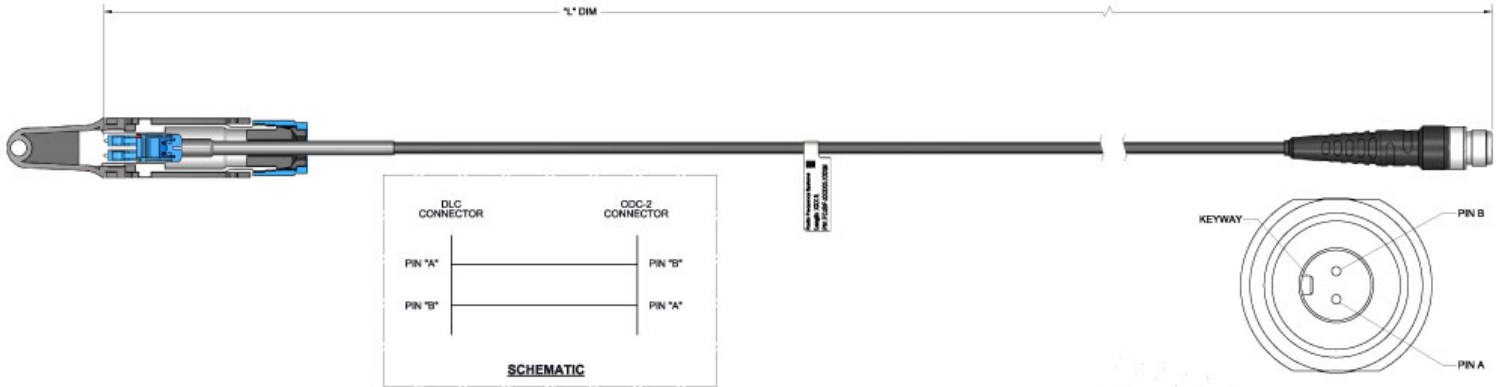

**ADDITIONAL ASSEMBLIES - ODC TO DLC**

| Length, m | Model Number        |
|-----------|---------------------|
| 1         | HA-FOJBF-OL-01SM-1  |
| 3         | HA-FOJBF-OL-01SM-3  |
| 5         | HA-FOJBF-OL-01SM-5  |
| 10        | HA-FOJBF-OL-01SM-10 |
| 20        | HA-FOJBF-OL-01SM-20 |

**ADDITIONAL ASSEMBLIES - ODC TO DLC/FULLAXS**

| Length, m | Model Number        |
|-----------|---------------------|
| 1         | HA-FOJBF-OA-01SM-1  |
| 3         | HA-FOJBF-OA-01SM-3  |
| 5         | HA-FOJBF-OA-01SM-5  |
| 10        | HA-FOJBF-OA-01SM-10 |
| 20        | HA-FOJBF-OA-01SM-20 |
| 30        | HA-FOJBF-OA-01SM-30 |

**ADDITIONAL ASSEMBLIES - ODC TO DLC/NB**

| Length, m | Model Number     |
|-----------|------------------|
| 3         | FOJBF-OB01S-003M |
| 5         | FOJBF-OB01S-005M |

**ADDITIONAL ASSEMBLIES - ODC TO DLC/R2CT**

| Length, m | Model Number     |
|-----------|------------------|
| 3         | FOJBF-OC01S-003M |
| 5         | FOJBF-OC01S-005M |
| 10        | FOJBF-OC01S-010M |
| 20        | FOJBF-OC01S-020M |



### FOJBF-OSFP01S-010M

HYBRIFLEX® Optical Fiber Cabling Solution, 1 Pair Armored Bend-Insensitive Single-Mode Fiber with ODC to DLC/SFP Connectors, 10 m

#### ADDITIONAL ASSEMBLIES - ODC TO DLC/AOPC

| Length, m | Model Number     |
|-----------|------------------|
| 3         | FOJBF-ON01S-003M |
| 5         | FOJBF-ON01S-005M |
| 10        | FOJBF-ON01S-010M |
| 20        | FOJBF-ON01S-020M |

#### ADDITIONAL ASSEMBLIES - ODC TO DLC/AOPE

| Length, m | Model Number      |
|-----------|-------------------|
| 3         | FOJBF-OPE01S-003M |
| 5         | FOJBF-OPE01S-005M |
| 10        | FOJBF-OPE01S-010M |
| 20        | FOJBF-OPE01S-020M |

#### ADDITIONAL ASSEMBLIES - ODC TO DLC/AOPA

| Length, m | Model Number      |
|-----------|-------------------|
| 3         | FOJBF-OPA01S-003M |
| 5         | FOJBF-OPA01S-005M |

#### ADDITIONAL ASSEMBLIES - ODC TO DLC/SFP

| Length, m | Model Number       |
|-----------|--------------------|
| 3         | FOJBF-OSFP01S-003M |
| 5         | FOJBF-OSFP01S-005M |
| 10        | FOJBF-OSFP01S-010M |
| 20        | FOJBF-OSFP01S-020M |