




PRODUCT DESCRIPTION

RFS' HYBRIFLEX Remote Radio Head (RRH) hybrid feeder cabling solution combines any combination of optical fiber and/or DC power for RRHs in a single lightweight armored or unarmored cable, making it the world's most innovative solution for RRH deployments. Hybrid, Fiber Optic and DC riser trunk and jumper cables are available in a large variety of fiber counts, DC counts and cross sections. Both pre-connectorized and on-site options are available.



FEATURES / BENEFITS

- Ruggedized, bend-insensitive fiber design with outstanding bending characteristics
• Lightweight solution and compact design - Decreases tower loading
• Robust cabling - Eliminates need for expensive cable trays and ducts
• Installation of tight bundled fiber optic cable pair directly to the RRH - Reduces CAPEX and wind load by eliminating need for interconnection
• Outdoor, black jacket - Ensures long-lasting cable protection
• 100% Factory tested - Online test results available

TECHNICAL FEATURES

STRUCTURE

Table with 3 columns: Property, Unit, Value. Rows include Cable Type (HYBRIFLEX®), Fire Performance (Flame Retardant), and Length (1.8 (6) m (ft)).

MECHANICAL SPECIFICATIONS

Table with 3 columns: Property, Unit, Value. Rows include Outer Diameter Nominal (5.5 (0.217) mm (in)), Cable Weight (0.033 (0.022) kg/m (lb/ft)), Minimum Bending Radius (66 (2.6) mm (in)), and Recommended / Maximum Clamp Spacing (1 / 1.2 (3.25 / 4) m (ft)).

F/O CABLE SPECIFICATIONS

Table with 3 columns: Property, Unit, Value. Rows include Number of F/O Pairs (1), F/O Cable Type (G657-A2 Single Mode, Bend Tolerant), Core/Clad (9/125 μm), Secondary Protection Nominal (900 (0.035) μm (in)), F/O Standards (UL Listed Type OFNR (UL1666), RoHS Compliant), Optical Loss (0.5 @ 1310 nm, 0.5 @ 1550 nm dB/Km), FO Break-out Length (279 (11) mm (in)), FO Break-out Length (228 (9) mm (in)), and Cable Sealing Method (Semi-rigid flame-retardant polyolefin, with hot melt adhesive).



**FR-N-6SM-01-6F**

HYBRIFLEX® RRH Optical Fiber Cable, 6 Pair, Ruggedized Bend-Insensitive Single-Mode Fiber, DLC Connectors, 6 ft

Fiber Termination End 1		DLC Connector
Fiber Termination End 2		DLC Connector

**CABLE JACKET**

UV-Protection Individual and External Jacket		Yes
Jacket Material		Flame Retardant, Indoor/Outdoor, PVC, Black


**TESTING AND ENVIRONMENTAL**

Storage Temperature	°C (°F)	-40 to 70 (-40 to 158)
Operation Temperature	°C (°F)	-40 to 65 (-40 to 149)
Installation Temperature	°C (°F)	-20 to 65 (-4 to 149)
Jacket Specifications		UL 1666

**EXTERNAL DOCUMENT LINKS**

- Installation Guidelines: [Download](#)
- QuickShip 2.0 Program Information: [Download](#)
- On-line Factory Test Results: [View](#)

**NOTES**

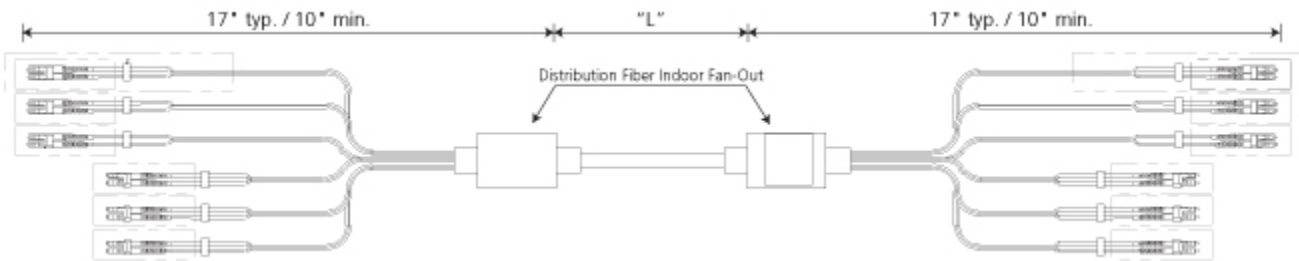



**FR-N-6SM-01-6F**

HYBRIFLEX® RRH Optical Fiber Cable, 6 Pair, Ruggedized Bend-Insensitive Single-Mode Fiber, DLC Connectors, 6 ft

**ADDITIONAL ASSEMBLIES - 1 PAIR SM FIBER**

Length, ft	Model Number
6	FR-N-1SM-01-6F
10	FR-N-1SM-01-10F
15	FR-N-1SM-01-15F
20	FR-N-1SM-01-20F
30	FR-N-1SM-01-30F
40	FR-N-1SM-01-40F
50	FR-N-1SM-01-50F
60	FR-N-1SM-01-60F
79	FR-N-1SM-01-70F
80	FR-N-1SM-01-80F
90	FR-N-1SM-01-90F
100	FR-N-1SM-01-100F

**ADDITIONAL ASSEMBLIES - 2 PAIR SM FIBER**

Length, ft	Model Number
10	FR-N-2SM-01-10F
20	FR-N-2SM-01-20F
30	FR-N-2SM-01-30F
40	FR-N-2SM-01-40F
50	FR-N-2SM-01-50F
60	FR-N-2SM-01-60F
70	FR-N-2SM-01-70F
80	FR-N-2SM-01-80F
90	FR-N-2SM-01-90F
100	FR-N-2SM-01-100F

**FR-N-6SM-01-6F**

HYBRIFLEX® RRH Optical Fiber Cable, 6 Pair, Ruggedized Bend-Insensitive Single-Mode Fiber, DLC Connectors, 6 ft

**ADDITIONAL ASSEMBLIES - 3 PAIR SM FIBER**

Length, ft	Model Number
3	FR-N-3SM-01-3F
4	FR-N-3SM-01-4F
6	FR-N-3SM-01-6F
8	FR-N-3SM-01-8F
10	FR-N-3SM-01-10F
15	FR-N-3SM-01-15F
20	FR-N-3SM-01-20F
30	FR-N-3SM-01-30F
50	FR-N-3SM-01-50F

**ADDITIONAL ASSEMBLIES - 6 PAIR SM FIBER**

Length, ft	Model Number
3	FR-N-6SM-01-3F
4	FR-N-6SM-01-4F
6	FR-N-6SM-01-6F
8	FR-N-6SM-01-8F
10	FR-N-6SM-01-10F
15	FR-N-6SM-01-15F
20	FR-N-6SM-01-20F
30	FR-N-6SM-01-30F
40	FR-N-6SM-01-40F

**ADDITIONAL ASSEMBLIES - 12 PAIR SM FIBER**

Length, ft	Model Number
3	FR-N-12SM-01-3F
4	FR-N-12SM-01-4F
6	FR-N-12SM-01-6F
8	FR-N-12SM-01-8F
10	FR-N-12SM-01-10F
15	FR-N-12SM-01-15F
20	FR-N-12SM-01-20F
30	FR-N-12SM-01-30F



**FR-N-6SM-01-6F**

HYBRIFLEX® RRH Optical Fiber Cable, 6 Pair, Ruggedized Bend-Insensitive Single-Mode Fiber, DLC Connectors, 6 ft

**ADDITIONAL ASSEMBLIES - 1 STRAND SM FIBER**

Length, ft	Model Number
10	FR-N-1SSM-01-10F
20	FR-N-1SSM-01-20F
30	FR-N-1SSM-01-30F
40	FR-N-1SSM-01-40F
50	FR-N-1SSM-01-50F
60	FR-N-1SSM-01-60F
70	FR-N-1SSM-01-70F
80	FR-N-1SSM-01-80F
90	FR-N-1SSM-01-90F
100	FR-N-1SSM-01-100F

**ADDITIONAL ASSEMBLIES - 2 STRAND SM FIBER**

Length, ft	Model Number
10	FR-N-2SSM-01-10F
20	FR-N-2SSM-01-20F
30	FR-N-2SSM-01-30F
40	FR-N-2SSM-01-40F
50	FR-N-2SSM-01-50F
60	FR-N-2SSM-01-60F
70	FR-N-2SSM-01-70F
80	FR-N-2SSM-01-80F
90	FR-N-2SSM-01-90F
100	FR-N-2SSM-01-100F



**PRE-PACKED HYBRIFLEX KITS FOR EASY INTEGRATION INTO RAYCAP JUNCTION BOXES**

RFS Technologies now offers Kitting options for most hybrid risers and jumpers that include both the cable assembly and the Raycap inserts. For reference, kits have a “K” as the third digit in the model number. HB158 does not require an additional gland/insert for proper installation and sealing into the Distribution Boxes.

Kit Model Prefix	Assembly Prefix	Assembly Qty	Raycap Insert Kit	Insert Kit Contents	Raycap Insert Kit Qty
<b>HBK114</b>	HB114	1	RFS Technologies-TRUNK-KIT	(2) 190 0620, Insert, M75, 1H, 40mm	1
<b>HBK058</b>	HBF058		RFS Technologies-JUMP-KIT	(1) 190 0621, Insert, M75, 3H, 22mm, Split w/ plugs	
<b>HBK012</b>	HBF012		RFS Technologies-JUMP-KIT-2	(1) 190 0903, Insert, M75, 2H, 15mm, Split w/ plugs	
<b>FRK-N</b>	FR-N		RFS Technologies-FIBER-KIT	(1) 190 0657, Insert, M75, 6H, 6.1mm, Split w/ plugs	