
PRODUCT DATASHEET

FTP4-2X3

Feed through entry panel, 102mm (4"), 6 holes, 2x3

Aluminum feed through entry panels enable transmission line runs to enter buildings and shelters. These rugged panels guide the transmission line at the entry point and prevent moisture from entering the building. Each panel features 102mm (4"") openings to accept boot assemblies. Feed through panels are offered with a broad selection of hole patterns and plate sizes to match your exact application. These entries can be used in both interior and exterior wall applications to create a neat and clean installation. Each panel includes a set of wall attachment hardware, including stainless steel screws, finishing washers and plastic anchors and is powder coated to ensure long term integrity and provide appealing aesthetics. Protection caps for all unused openings are also included. These caps are only dust protection offered. For water proofing suitable additional measures, e.g. tape wrap. Boot assemblies are purchased separately to accommodate specific transmission line requirements.



FEATURES / BENEFITS

External Document Links

Notes

Technical features

STRUCTURE

Product Line		Elliptical Waveguide Accessories	Coaxial Cable Accessories
Product Type		Wall/Roof Feed-Through System	
Feed-Through Component		Aluminum Feed-Through Entry Panel	
Coaxial Cable Type		Air Dielectric	Foam Dielectric
Configuration		2 x 3	

MECHANICAL SPECIFICATIONS

Feed-Through Holes		6
Feed-Through Hole Diameter	mm (in)	102 (4)
Color		Grey
Material		Aluminium


PACKAGING INFORMATION

Package Quantity		1
Weight per piece	kg (lb)	2.3 (4.95)
Box Dimensions (Bulk Shipping), L x W x H	mm (in)	610 x 457 x 51 (24 x 18 x 2)

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

FTP4-2X3

Feed through entry panel, 102mm (4"), 6 holes, 2x3

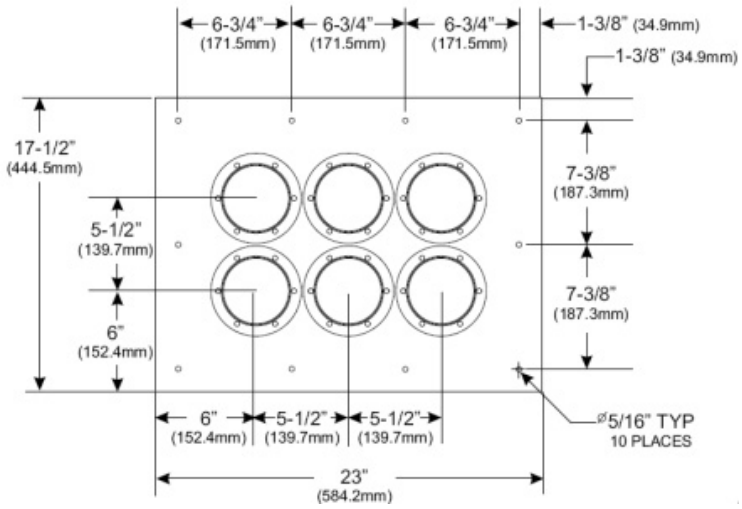

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering