



**HA-FOJBF-OA-01SM-xx Series**

HYBRIFLEX® Optical Fiber Cabling Solution, 1 Pair Armored Bend-Insensitive Single-Mode Fiber with ODC to LC/FullAXS Compatible Connectors

**PRODUCT DESCRIPTION**

RFS' HYBRIFLEX Remote Radio Head (RRH) hybrid feeder cabling solution combines any combination of optical fiber and/or DC power for RRHs in a single lightweight armored or unarmored cable, making it the world's most innovative solution for RRH deployments. Hybrid, Fiber Optic and DC riser trunk and jumper cables are available in a large variety of fiber counts, DC counts and cross sections. Both pre-connectorized and on-site options are available.



**FEATURES / BENEFITS**

- Armored, bend-insensitive fiber design with outstanding bending characteristics – Eases installation and provides long-term reliability
- Lightweight solution and compact design – Decreases tower loading
- Robust cabling – Eliminates need for expensive cable trays and ducts
- Indoor/Outdoor, black PVC jacket – Ensures long-lasting cable protection
- **100% Factory tested - Online test results available**

**TECHNICAL FEATURES**

**STRUCTURE**

Cable Type		HYBRIFLEX®
Fire Performance		Flame Retardant

**MECHANICAL SPECIFICATIONS**

Outer Diameter Nominal	mm (in)	4.8 (0.189)
Cable Weight	kg/m (lb/ft)	0.035 (0.023)
Minimum Bending Radius, Single Bend	mm (in)	50 (1.97)
Minimum Bending Radius, Multiple Bends	mm (in)	75 (2.95)
Recommended / Maximum Clamp Spacing	m (ft)	1 / 1.2 (3.25 / 4)

**F/O CABLE SPECIFICATIONS**

Number of F/O Pairs		1
F/O Cable Type		G657-A1 Single Mode, Bend Tolerant
Core/Clad	µm	9/125
Secondary Protection Nominal	µm (in)	900 (0.035)
F/O Standards (Meets or Exceeds)		RoHS Compliant
Optical Loss	dB/Km	0.5 @ 1310 nm 0.5 @ 1550 nm



**HA-FOJBF-OA-01SM-xx Series**

HYBRIFLEX® Optical Fiber Cabling Solution, 1 Pair Armored Bend-Insensitive Single-Mode Fiber with ODC to LC/FullAXS Compatible Connectors

Fiber Termination End 1		ODC socket
Fiber Termination End 2		DLC Connector with FullAXS Compatibility

**CABLE JACKET**

UV-Protection Individual and External Jacket		Yes
Jacket Material		Flame Retardant, Indoor/Outdoor, Black, LSZH
Armor Type		Metal Armored Tube
Diameter Corrugated Armor	mm (in)	2.8 (0.11)


**TESTING AND ENVIRONMENTAL**

Storage Temperature	°C (°F)	-40 to 70 (-40 to 158)
Operation Temperature	°C (°F)	-40 to 65 (-40 to 149)
Installation Temperature	°C (°F)	-20 to 65 (-4 to 149)

**EXTERNAL DOCUMENT LINKS**

Installation Guidelines: [Download](#)  
 On-line Factory Test Results: [View](#)  
 FullAXS Compatible Connector: [Installation Guidelines](#)

**NOTES**

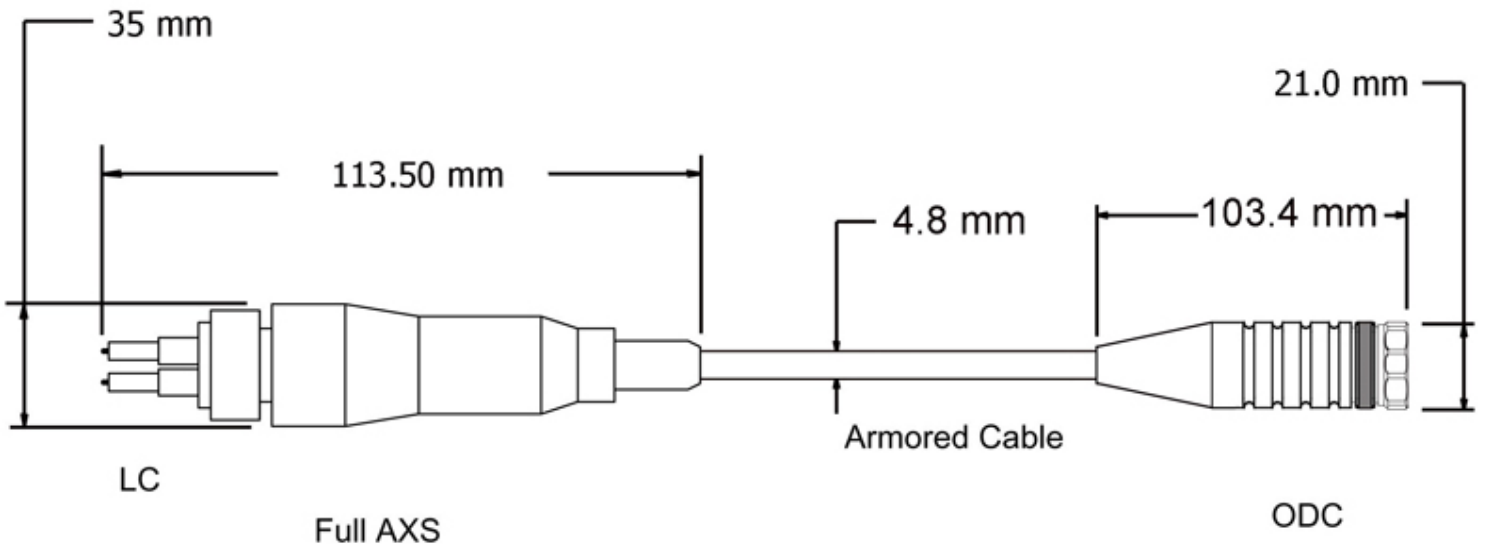

**ADDITIONAL ASSEMBLIES - ODC TO DLC**

Length, m	Model Number
1	HA-FOJBF-OL-01SM-1
3	HA-FOJBF-OL-01SM-3
5	HA-FOJBF-OL-01SM-5
10	HA-FOJBF-OL-01SM-10
20	HA-FOJBF-OL-01SM-20

**ADDITIONAL ASSEMBLIES - ODC TO DLC/FULLAXS**

Length, m	Model Number
1	HA-FOJBF-OA-01SM-1
3	HA-FOJBF-OA-01SM-3
5	HA-FOJBF-OA-01SM-5
10	HA-FOJBF-OA-01SM-10
20	HA-FOJBF-OA-01SM-20
30	HA-FOJBF-OA-01SM-30



### HA-FOJBF-OA-01SM-xx Series

HYBRIFLEX® Optical Fiber Cabling Solution, 1 Pair Armored Bend-Insensitive Single-Mode Fiber with ODC to LC/FullAXS Compatible Connectors

#### ADDITIONAL ASSEMBLIES - ODC TO DLC/NB

Length, m	Model Number
3	FOJBF-OB01S-003M
5	FOJBF-OB01S-005M

#### ADDITIONAL ASSEMBLIES - ODC TO DLC/AOPC

Length, m	Model Number
3	FOJBF-ON01S-003M
5	FOJBF-ON01S-005M
10	FOJBF-ON01S-010M
20	FOJBF-ON01S-020M

#### ADDITIONAL ASSEMBLIES - ODC TO DLC/AOPE

Length, m	Model Number
3	FOJBF-OPE01S-003M
5	FOJBF-OPE01S-005M
10	FOJBF-OPE01S-010M
20	FOJBF-OPE01S-020M

#### ADDITIONAL ASSEMBLIES - ODC TO DLC/R2CT

Length, m	Model Number
3	FOJBF-OC01S-003M
5	FOJBF-OC01S-005M
10	FOJBF-OC01S-010M
20	FOJBF-OC01S-020M

#### ADDITIONAL ASSEMBLIES - ODC TO DLC/AOPA

Length, m	Model Number
3	FOJBF-OPA01S-003M
5	FOJBF-OPA01S-005M

#### ADDITIONAL ASSEMBLIES - ODC TO DLC/SFP

Length, m	Model Number
3	FOJBF-OSFP01S-003M
5	FOJBF-OSFP01S-005M
10	FOJBF-OSFP01S-010M
20	FOJBF-OSFP01S-020M