PRODUCT DATASHEET

# HA-FOPLUG-A-04

Field Installable FullAXS Compatible Connector

Ideal for adapting HYBRIFLEX Hybrid or Fiber Only jumpers to equipment requiring a FullAXS compatible optical fiber interconnect. Easily installed over factory LC fiber termination and seals on fiber OD. Dust cap included to seal unused fiber terminations.



FEATURES / BENEFITS

- Cost effective solution
- IP67 rated

External Document Links

Installation Guidelines

Notes

## Technical features

### MECHANICAL SPECIFICATIONS


| | | |
|---|---|---|
| **Material** | | Plastic Shell with Rubber Oring |
| **Mating Cycles** | | 100 |
| **Dust Cap** | | Yes |

### TESTING AND ENVIRONMENTAL

| | | |
|---|---|---|
| **Operation Temperature** | °C (°F) | -40 to 85 (-40 to 185 ) |
| **Sealing Class** | | IP67 |
| **UV-Protection** | | Yes |

### F/O CABLE SPECIFICATIONS

| | | |
|---|---|---|
| **Supported Fiber Type** | | Single or Multi Mode with 5mm OD |
| **Mating Face** | | FullAXS Plug |
| **Standard** | | RoHS Compliant |

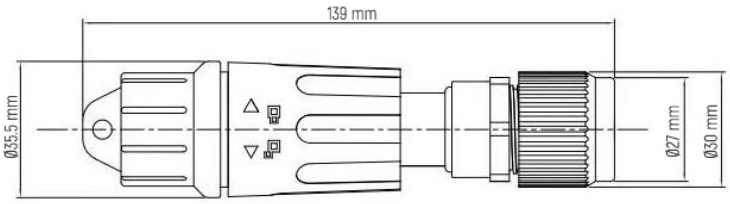




All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering