



**HBF058-13U1SS4-40A**

HYBRIFLEX® RRH Hybrid Jumper, 5/8", 1 pair 6AWG, 4 Single Strand, Single-Mode Fiber with Simplex LC to Simplex LC with Pull-tab, 40ft Lengths

**PRODUCT DESCRIPTION**

RFS Technologies' HYBRIFLEX Remote Radio Head (RRH) hybrid feeder cabling solution combines optical fiber and DC power for RRHs in a single lightweight cable, making it the world's most innovative solution for RRH deployments. It was developed to reduce installation complexity and costs at Cellular sites. HYBRIFLEX allows mobile operators deploying an RRH architecture to standardize the RRH installation process. HYBRIFLEX combines optical fiber (multi-mode or single-mode) and power in a single cable. It may eliminate the need for junction boxes and can connect multiple RRHs with a single feeder. Standard CELLFLEX® accessories can be used with HYBRIFLEX cable.



**FEATURES / BENEFITS**

- TC type cable with outstanding bending characteristics - Minimizes installation time and enables mechanical protection and shielding
- Lightweight solution and compact design - Decreases tower loading
- Robust cabling - Eliminates need for expensive cable trays and ducts
- Installation of tight bundled fiber optic cable directly to the RRH - Reduces CAPEX and wind load by eliminating need for interconnection
- Optical fiber and power cables housed in single cable - Saves CAPEX by standardizing RRH cable installation and reducing installation requirements
- UL-Listed, flame-retardant jacket, UV protected assemblies - Allows both indoor and outdoor applications
- **100% Factory tested - Online test results available**

**TECHNICAL FEATURES**

**STRUCTURE**

Cable Type		HYBRIFLEX®, Type TC
Fire Performance		Flame Retardant
Size		5/8"
Length	m (ft)	12.2 (40)

**MECHANICAL SPECIFICATIONS**

Outer Diameter Nominal	mm (in)	17 (0.669)
Cable Weight	kg/m (lb/ft)	0.469 (0.316)
Minimum Bending Radius, Single Bend	mm (in)	102 (4)
Minimum Bending Radius, Multiple Bends	mm (in)	254 (10)
Recommended / Maximum Clamp Spacing	m (ft)	1 / 1.2 (3.25 / 4)

**CABLE JACKET**

UV-Protection Individual and External Jacket		Yes
--	--	-----



**HBF058-13U1SS4-40A**

HYBRIFLEX® RRH Hybrid Jumper, 5/8", 1 pair 6AWG, 4 Single Strand, Single-Mode Fiber with Simplex LC to Simplex LC with Pull-tab, 40ft Lengths

**DC POWER CABLE SPECIFICATIONS**

Number of DC Pairs		1
Maximum DC-Resistance Power Cable	Ω/km (Ω/kft)	1.4 (0.42)
Cross Section of Power Cable	mm <sup>2</sup> (AWG)	13.3 (6)
DC Wire Jacket Material		PVC/Nylon
DC Cable Single Bending Radius	mm (in)	83 (3.3)
DC Cable Diameter	mm (in)	6.45 (0.25)
DC Standards (Meets or Exceeds)		For use in Type TC per UL 1277, PVC Nylon, RoHS/REACH Compliant
Break-out length (Top)	mm (in)	650 (26)
Break-out length (Bottom)	mm (in)	650 (26)
DC cable sealing method		Semi-rigid, flame-retardant polyolefin, with hot melt adhesive

**F/O CABLE SPECIFICATIONS**

Number of Fiber Strands		4
F/O Cable Type		G657-A2 Single Mode, Bend Tolerant
Core/Clad	μm	9/125
Single Bending Radius	mm (in)	55 (2.2)
F/O Standards (Meets or Exceeds)		UL Listed Type OFNR (UL1666), RoHS Compliant
Optical Loss	dB/Km	0.5 @ 1310 nm 0.5 @ 1550 nm
FO Break-out Length (Top)	mm (in)	1219 (48)
FO Break-out Length (Bottom)	mm (in)	1219 (48)
Cable Sealing Method		Semi-rigid flame-retardant polyolefin, with hot melt adhesive
Fiber Termination End 1		Simplex LC
Fiber Termination End 2		Simplex LC with Pull-tab




**HBF058-13U1SS4-40A**

HYBRIFLEX® RRH Hybrid Jumper, 5/8", 1 pair 6AWG, 4 Single Strand, Single-Mode Fiber with Simplex LC to Simplex LC with Pull-tab, 40ft Lengths

**TESTING AND ENVIRONMENTAL**

Storage Temperature	°C (°F)	-40 to 70 (-40 to 158)
Operation Temperature	°C (°F)	-40 to 65 (-40 to 149)
Installation Temperature	°C (°F)	-20 to 65 (-4 to 149)
Jacket Specifications		UL1277 Type TC, UL Listed

**PRODUCT DRAWING**

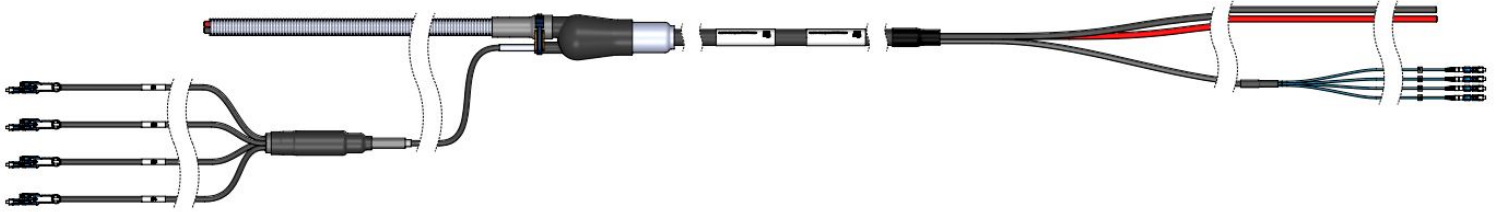

Product Drawing

**ASSEMBLY LENGTH**

Model Number	Length
HBF058-13U1SS4-10A	10 feet
HBF058-13U1SS4-20A	20 feet
HBF058-13U1SS4-30A	30 feet
HBF058-13U1SS4-40A	40 feet
HBF058-13U1SS4-50A	50 feet
HBF058-13U1SS4-60A	60 feet

Custom length available upon request.