



Air Dielectric Cable 7/8" low loss air dielectric cable; Plenum-rated with White Jacket

FEATURES / BENEFITS

• Low Attenuation

The low attenuation of Air Dielectric Cable coaxial cable results in highly efficient signal transfer in your RF system.

• Complete Shielding

The solid outer conductor of Air Dielectric Cable coaxial cable creates a continuous RFI/EMI shield that minimizes system interference.

• Low VSWR

Special low VSWR versions of Air Dielectric Cable coaxial cables contribute to low system noise.

• Outstanding Intermodulation Performance


Air Dielectric Cable coaxial cable's solid inner and outer conductors virtually eliminate intermods. Intermodulation performance is also confirmed with state-of-the-art equipment at the RFS Technologies factory.

• High Power Rating

Due to their low attenuation, outstanding heat transfer properties and temperature stabilized dielectric materials, Air Dielectric Cable cable provides safe long term operating life at high transmit power levels.

• Wide Range of Application

Typical areas of application are: feedlines for broadcast and terrestrial microwave antennas, wireless cellular, PCS and ESMR base stations, cabling of antenna arrays, and radio equipment interconnects.

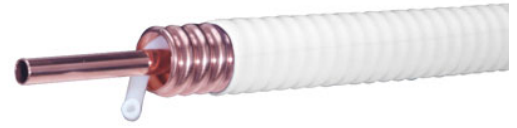

7/8" Air Dielectric Cable® Air Dielectric Coaxial Cable, White

Technical features

APPLICATIONS

Applications		Wireless Communication	TV & Radio	HF Defense	Mobile Radio	Cable Solutions
--------------	--	------------------------	------------	------------	--------------	-----------------

STRUCTURE

Size		7/8
Jacket Option		White
Inner Conductor Diameter	mm (in)	9 (0.35)
Inner Conductor Material		Copper Tube
Dielectric Diameter	mm (in)	20.2 (0.79)
Dielectric Material		Helical Polyethylene Spacer
Outer Conductor Diameter	mm (in)	25.5 (1)
Outer Conductor Material		Corrugated Copper
Jacket Diameter	mm (in)	28 (1.103)
Jacket Material		Polyvinylidene Fluoride, PVDF
Cable Type		Air-Dielectric, Corrugated



**TESTING AND ENVIRONMENTAL**

<b>Fire Performance</b>		Flame Retardant, Plenum Rated
<b>Flame Retardant Jacket Specifications</b>		Meets/Exceeds Steiner Tunnel Test Method UL 910, NEC 820-53 (a) CATVP, NFPA-262.
<b>Installation Temperature</b>	°C(°F)	-40 to 60 (-40 to 140)
<b>Storage Temperature</b>	°C (°F)	-40 to 85 (-40 to 185)
<b>Operation Temperature</b>	°C(°F)	-50 to 85 (-58 to 185)

**ELECTRICAL SPECIFICATIONS**

<b>Impedance</b>	Ω	50 +/- 0.5
<b>Maximum Frequency</b>	GHz	4.2
<b>Velocity</b>	%	93
<b>Capacitance</b>	pF/m (pF/ft)	71 (21.6)
<b>Inductance</b>	uH/m (uH/ft)	0.178 (0.054)
<b>Peak Power Rating</b>	kW	73
<b>RF Peak Voltage</b>	Volts	2700
<b>Jacket Spark</b>	Volt RMS	8000
<b>Inner Conductor dc Resistance</b>	Ω/1000 m (Ω/1000 ft)	1.1 (0.34)
<b>Outer Conductor dc Resistance</b>	Ω/1000 m (Ω/1000 ft)	0.88 (0.27)
<b>Return Loss (VSWR) Performance</b>		Standard
<b>Min. Return Loss (Max. VSWR)</b>	dB (VSWR)	21 (1.195) @ 698-798 MHz 21 (1.195) @ 824-960 MHz 21 (1.195) @ 1695-1780 MHz 21 (1.195) @ 1850-2020 MHz 21 (1.195) @ 2110-2200 MHz 21 (1.195) @ 2305-2320 MHz 21 (1.195) @ 2345-2360 MHz 21 (1.195) @ 2496-2700 MHz 18 (1.288) @ 2700-3000 MHz 15 (1.432) @ 3550-3700 MHz 13 (1.576) @ 3700-3900 MHz 11 (1.784) @ 3980-4200 MHz
<b>Temperature &amp; Power</b>		Standard

**MECHANICAL SPECIFICATIONS**

<b>Cable Weight, Nominal</b>	kg/m (lb/ft)	0.68 (0.46)
<b>Minimum Bending Radius, Single Bend</b>	mm (in)	100 (4)
<b>Minimum Bending Radius, Repeated Bends</b>	mm (in)	250 (10)
<b>Bending Moment</b>	Nm (lb-ft)	27 (20)
<b>Tensile Strength</b>	N (lb)	1600 (360)
<b>Recommended / Maximum Clamp Spacing</b>	m (ft)	0.5 / 0.9 (1.8 / 3)



**ATTENUATION @ 20°C (68°F) AND POWER RATING @ 40°C (104°F)**

Frequency, MHz	dB per 100m	dB per 100ft	Power, kW
0.5	0.08	0.03	73
1	0.12	0.04	73
1.5	0.14	0.04	70.90
2	0.16	0.05	61.40
10	0.37	0.11	27.30
20	0.52	0.16	19.20
30	0.64	0.19	15.70
50	0.83	0.25	12.10
88	1.10	0.34	9.11
100	1.18	0.36	8.49
108	1.23	0.37	8.15
150	1.45	0.44	6.92
174	1.57	0.48	6.39
200	1.69	0.51	5.94
300	2.08	0.63	4.84
400	2.42	0.74	4.17
450	2.57	0.79	3.93
500	2.72	0.83	3.71
512	2.76	0.84	3.66
600	3	0.91	3.37
700	3.25	0.99	3.12
800	3.49	1.07	2.91
824	3.55	1.08	2.86
894	3.71	1.13	2.74
900	3.72	1.13	2.74
925	3.78	1.15	2.69
960	3.85	1.17	2.65
1000	3.94	1.20	2.59
1250	4.45	1.36	2.30
1500	4.91	1.50	2.10
1700	5.26	1.60	1.97
1800	5.43	1.65	1.91
2000	5.75	1.75	1.81
2200	6.07	1.85	1.72
2300	6.22	1.90	1.68
3000	7.22	2.20	1.47



<b>3550</b>	8.33	2.54	1.35
<b>3700</b>	8.53	2.60	1.32
<b>3900</b>	8.79	2.68	1.29
<b>3980</b>	8.89	2.71	1.27
<b>4000</b>	8.92	2.72	1.27
<b>4200</b>	9.17	2.79	1.24

External Document Links

Notes