PRODUCT DATASHEET

HCH-550-1C

Cable hanger for Air Dielectric Cable

Hangers for the installation of Air Dielectric Cables on different supporting profiles.
Cable Clamp and Extended Counterbed hot-galvanized steel
Screw: stainless steel.

FEATURES / BENEFITS



picture shows the 1L4 version
for illustration purpose only

Technical features

GENERAL SPECIFICATIONS

Product Line		Coaxial Cable Accessories
Product Type		Hanger
Hanger Type		Anchor bar 18-22mm (0.71-0.87")
Transmission Line Type		HCA550
Cable Type		Air Dielectric

MECHANICAL SPECIFICATIONS

Cable Size		5-1/2
Material		Cable Clamp : hot-dip galvanized Extended Counterbed : hot-dip galvanized Screw: Stainless steel
Recommended / Maximum Clamp Spacing	m (ft)	1 / 2 (3.3 / 6.6)

TEMPERATURE SPECIFICATIONS

Operation Temperature	°C (°F)	-50 to 85 (-58 to 185)
Storage Temperature	°C (°F)	-50 to 85 (-58 to 185)


PACKAGING INFORMATION

Package Quantity		1


All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

HCH-550-1C

Cable hanger for Air Dielectric Cable

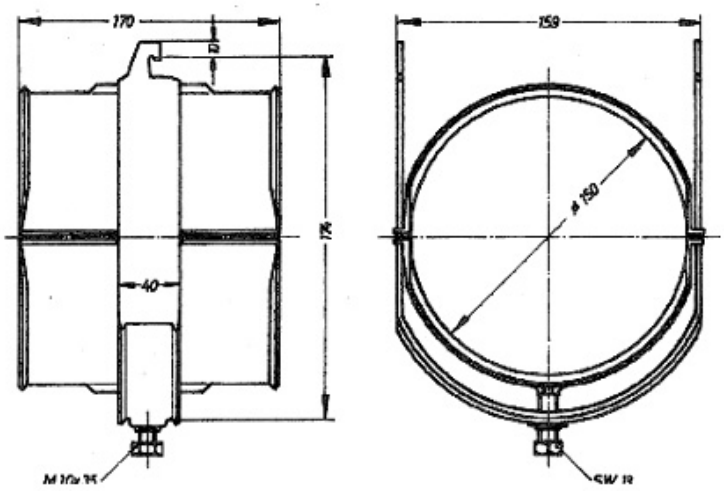

HCH Clamps available for different types of interfaces:

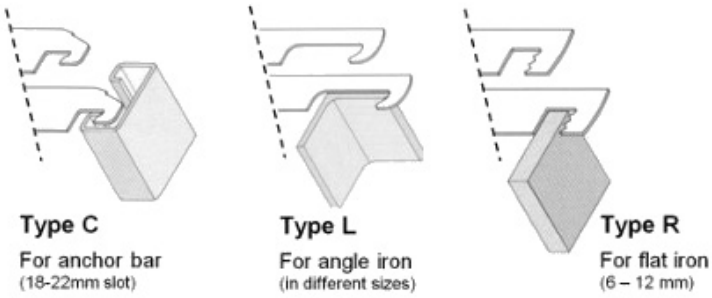

Type C
For anchor bar
(18-22mm slot)

Type L
For angle iron
(in different sizes)

Type R
For flat iron
(6 – 12 mm)

External Document Links

Notes

Hangers for anchor bar 18-22 mm (0.71-0.87")

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering