

The omnidirectional antenna I-ATO5-43-380/6000 is designed for broadband in-building DAS applications supporting all kind of safety as well 4G/5G commercial wireless communication networks and WiFi/WLAN in all bands.

The antenna combines an aesthetical design with superior electrical characteristics notably a PIM optimized design to minimize network interferences.

The antenna is constructed from lightweight materials ideal for easy ceiling mounting. The low profile and off-white radome blends easily into most building aesthetics with minimum visual impact.

FEATURES / BENEFITS

- · Wideband omnidirectional antenna, supporting all wireless services in the frequency bands 380-520 / 698-960/ 1710-6000MHz
- · Aesthetical visual appearance, compact and light weight
- Indoor distribution of saftey and commercial wireless services
- PIM optimized antenna design (up to 153dBc @2x20W)
- · Easy installation, ceiling mounting



I-ATO5-43-380/6000

Omnidirectional Antenna

Indoor

Technical features

GEN	IERAL	. SPECI	IFICAT	IONS

Product Type

Techn. Application


MECHANICAL SPECIFICATIONS				
Number of Input Ports		1		
Connectors		4.3-10 female		
Connector Cable	mm (in)	300 (11.81)		
Mounting Hardware included		Ceiling, via hole		
Height (Less Connectors)	mm (in)	152 (6)		
Diameter (Less Connectors)	mm (in)	298 (11.7)		
Width (Less Connectors)	mm (in)	4.3 ()		
Length (Less Connectors)	mm (in)	4.3 ()		
Weight	kg (lb)	0.9 (1.98)		
ELECTRICAL SPECIFICATIONS				

Frequenz	MHz	380-520	698-960	1710-6000
Gain	dBi	2.0 ± 1.0	2.5 ± 1.0	4.0 ± 1.0
Beamwidth, vertical, typ.	o	90	90	35
VSWR		3.0	2.0	2.0
Intermodulation (IM3) (2x20W)	dBc	/	153dBc	153dBc
Impedance, Ohm	Ω	50		
Polarization		Vertical		
Total Input Power max.		50		


www.rfstechnologies.com I-ATO5-43-380/6000 REV: A REV DATE: 11 Dec 2017



MATERIAL				
Radome Material		ABS		
Radome Color		White (RAL 9003)		
TEMPERATURE SPECIFICATIONS				
Operation Temperature	°C (°F)	-40 to 55 (-40 to 131)		
TESTING AND ENVIRONMENTAL				
Environmental Class		Indoor		

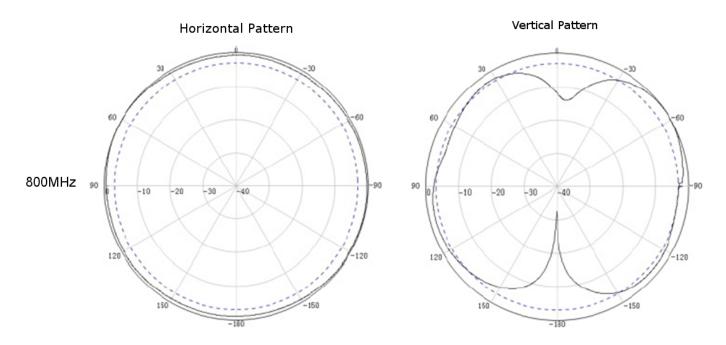

I-ATO5-43-380/6000 REV : A REV DATE : 11 Dec 2017 www.rfstechnologies.com

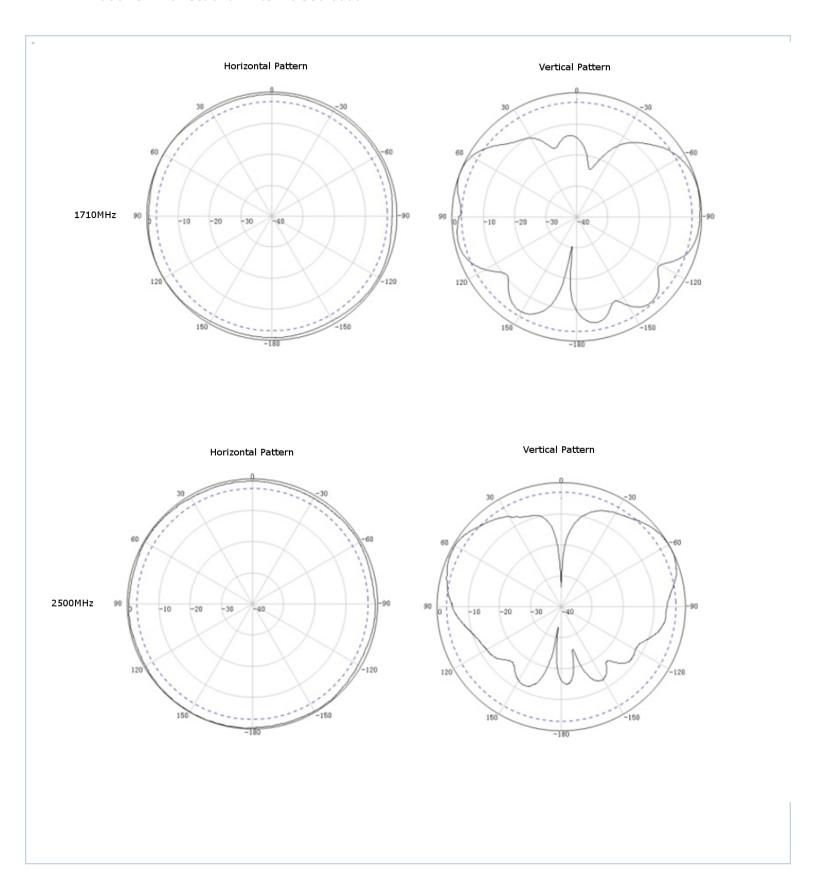

I-ATO5-43-380/6000 REV: A REV DATE: 11 Dec 2017 www.rfstechnologies.com



External Document Links				
Notes				

I-ATO5-43-380/6000 REV: A REV DATE: 11 Dec 2017 www.rfstechnologies.com