PRODUCT DATASHEET

I-ATP5-43-698/4000

Indoor Panel Antenna 698-4000MHz

The panel antenna I-ATP5-43-698/4000 is designed for broadband in-building DAS applications supporting all kind of safety as well as 4G and 5G commercial wireless communication networks. The antenna combines an aesthetical design with superior electrical characteristics notably a PIM optimized design to minimize network interferences. The antenna is constructed from lightweight materials ideal for easy ceiling mounting. The low profile and off-white radome blends easily into most building aesthetics with minimum visual impact.

FEATURES / BENEFITS

- Wideband omni antenna, supporting all wireless services in the frequency bands 698-960/1710-2700MHz/3400-4000MHz
- Typically used in indoor distribution of 2G/3G/4G/5G wireless services in all standardized frequency bands
- PIM optimized antenna design (-153dBc @2x20W)
- Aesthetical visual appearance, compact and light weight
- Low return loss, stable performance
- Pigtail with 4.3-10 female connector
- Ceiling mounting



I-ATP5-43-698/4000

Technical features

GENERAL SPECIFICATIONS

Product Type		Panel Antenna
Techn. Application		Indoor

MECHANICAL SPECIFICATIONS

Number of Input Ports		1
Connectors		4.3-10 female
Connector Cable	mm (in)	200 (7.9)
Mounting Hardware included		Wall bracket, screws
Height (Less Connectors)	mm (in)	200 (7.9)
Diameter (Less Connectors)	mm (in)	4.3 ()
Width (Less Connectors)	mm (in)	180 (7.1)
Length (Less Connectors)	mm (in)	62 (2.4)
Weight	kg (lb)	0.6 (1.32)

ELECTRICAL SPECIFICATIONS

Frequency	MHz	698 - 806	806 - 960	1710 - 2170	2170 - 2700	3400 - 4000
Gain, typ.	dBi	5.0 ± 1.0	6.0 ± 1.0	7.0 ± 1.0	7.5 ± 1.0	8.5 ± 1.0
max. VSWR		1.8	1.8	1.8	1.8	1.8
Beam width, Vertical, typ.	°	73	70	60	60	30
Beam width, Horizontal, typ.	°	80	80	65	60	55
Impedance, Ohm	Ω	50				
Polarization		Vertical				
Intermodulation (IM3)		-153dBc (2 x 43dBm)				
Total Input Power max.	W	50				

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

I-ATP5-43-698/4000

Indoor Panel Antenna 698-4000MHz

MATERIAL


Radome Material		ABS
Radome Color		White (RAL9003)

TEMPERATURE SPECIFICATIONS

Operation Temperature	°C (°F)	-40 to 55 (-40 to 131)

TESTING AND ENVIRONMENTAL

Environmental Class		Indoor

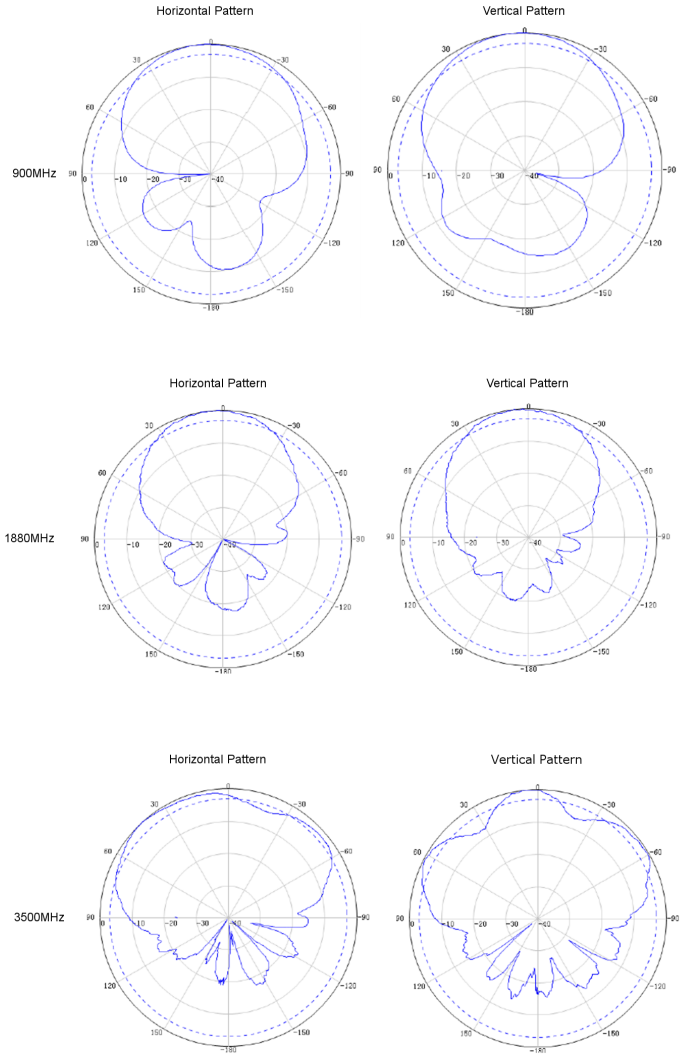

External Document Links

Notes

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering