Indoor Panel MIMO Antenna 698-4000 MHz

The panel antenna I-ATP5-43-698/4000M is designed for broadband in-building DAS applications supporting all kind of safety as well as 4G and 5G commercial wireless communication networks. The antenna combines an aesthetical design with superior electrical characteristics notably a PIM optimized design to minimize network interferences. The antenna is constructed from lightweight materials ideal for easy ceiling mounting. The low profile and off-white radome blends easily into most building aesthetics with minimum visual impact.

FEATURES / BENEFITS

- · Wideband panel antenna supporting the frequency bands 698-960/1710-2700 / 3400-4000MHz
- Typically used in indoor distribution of 2G/3G/4G/5G wireless services in all standardized frequency bands
- · Low return loss, High gain, Stable performance.
- PIM optimized antenna design (-153dBc @2x20W)
- · Aesthetical visual appearance, compact and light weight
- · Pigtail with 4.3-10 female connector
- · Ideal for 4G LTE multi-band MIMO applications



I-ATP5-43-698/4000M

Technical features

GENERAL SPECIFICATIONS

Product Type	Panel Antenna				
Techn. Application	Indoor				
MECHANICAL SPECIFICATIONS					

Į	VI	E	C	Н	ΑI	VI	C	ΑL	S	P	E	C	IF	IC	A	П	O	N	S

Number of Input Ports		2						
Connectors		4.3-10 female						
Mounting Hardware included		Wall bracket, screws						
Height (Less Connectors)	mm (in)	62 (2.44)						
Diameter (Less Connectors)	mm (in)	4.3 ()						
Width (Less Connectors)	mm (in)	180 (7.1)						
Length (Less Connectors)	mm (in)	403 (15.9)						
Weight	kg (lb)	1.5 (3.3)						

ELECTRICAL SPECIFICATIONS


Frequency	MHz	698 - 806	806 - 960	1710 - 2170	2200 - 2700	3400 - 4000				
Gain, typ.	dBi	5.0 6.0		7.0	7.5	8.5				
max. VSWR		2.0 2.0		2.0	2.0	2.0				
Beam width, Vertical, typ.	o	73	70	60	60	30				
Beam width, Horizontal, typ.	o	80	80 80		60	55				
Impedance, Ohm	Ω	50								
Polarization		Vertical and horizontal								
Intermodulation (IM3)		- 153dBc with 2 x 20W								
Total Input Power max.	W	50								


www.rfstechnologies.com I-ATP5-43-698/4000M REV: C REV DATE: 02 Apr 2019



Indoor Panel MIMO Antenna 698-4000 MHz

MATERIAL Radome Material ABS Radome Color White (RAL 9003) TEMPERATURE SPECIFICATIONS Operation Temperature °C (°F) -40 to 55 (-40 to 131) TESTING AND ENVIRONMENTAL



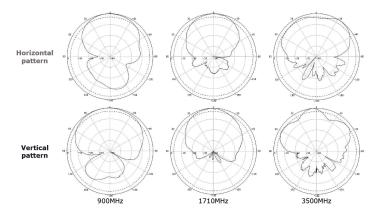

External Document Links

Notes

I-ATP5-43-698/4000M REV : C REV DATE : 02 Apr 2019 www.rfstechnologies.com