PRODUCT DATASHEET

I-ATPS6-43-698/3800M-3030

High Capacity Venue Panel MIMO Antenna 698-3800 MHz

The high capacity venue MIMO antenna I-ATPS6-43-698/3800M-3030 is designed for broadband DAS applications supporting all kind of safety as well as 4G and 5G commercial wireless communication networks.

The antenna is specifically optimized for stadium applications to allow for capacity optimized desings with a minimum of interferences between individual sectors.

The antenna combines an aesthetical design with superior electrical characteristics notably a PIM optimized design to minimize network interferences. The antenna is constructed from lightweight materials ideal for easy ceiling mounting. The low profile and off-white radome blends easily into most building aesthetics with minimum visual impact.



I-ATPS6-43-698/3800M-3030

FEATURES / BENEFITS

- **Wideband panel antenna supporting the frequency bands 698-960MHz /1695-2700MHz / 3300-3800MHz**
- **Ideally suited for high capacity venues as stadiums**
- **Indoor distribution of 2G/3G/4G/5G wireless networks ideally combined with multi-band MIMO**
- **High level of side lobe suppression minimizing interferences between sectors**
- **PIM optimized antenna design (-150dBc @2x20W)**
- **Low sidelobes**
- **Consisten pattern over the full spectrum**
- **Aesthetical visual appearance, compact and light weight**
- **4.3-10 female connector**

Technical features

GENERAL SPECIFICATIONS

Product Type		High Capacity Venue MIMO Antenna
Techn. Application		Indoor

MECHANICAL SPECIFICATIONS

Number of Input Ports		2
Connectors		4.3-10 female
Height (Less Connectors)	mm (in)	95 (3.7)
Width (Less Connectors)	mm (in)	695 (27.4)
Length (Less Connectors)	mm (in)	695 (27.4)
Weight	kg (lb)	11 (24.3)

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

I-ATPS6-43-698/3800M-3030

High Capacity Venue Panel MIMO Antenna 698-3800 MHz

ELECTRICAL SPECIFICATIONS

Frequency	MHz	698 - 800	800 - 960	1695 - 2180	2180 - 2700	3300 - 3800
Gain, typ.	dBi	11.5	12.0	13.0	13.5	13.5
VSWR / Return Loss	max	1.6	1.6	1.6	1.6	1.6
Beamwidth, Vertical, typ.	°	35	31	34	29	30
Beamwidth, Horizontal, typ.	°	35	31	34	29	30
Isolation	dB	26	26	26	26	29
Front-to-Back Ratio	dB	25	25	25	25	28
Maximum Input Power	W	200	200	200	200	100
Impedance, Ohm	Ω	50				
Polarization		+/- 45°				
Intermodulation (IM3)		- 150dBc with 2 x 20W				

MATERIAL


Radome Material		ABS, ASA, UV resistant
Radome Color		White

TEMPERATURE SPECIFICATIONS

Operation Temperature	°C (°F)	-40 to 60 (-40 to 140)


TESTING AND ENVIRONMENTAL

Environmental Class		IP65

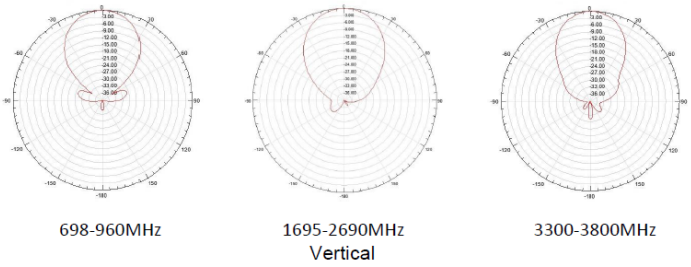

698-960MHz | 1695-2690MHz | 3300-3800MHz

Vertical

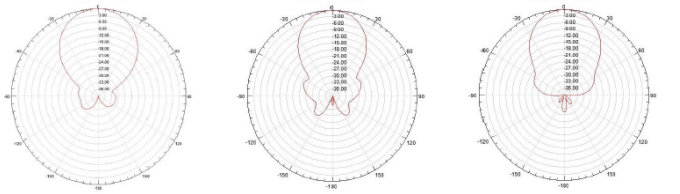

698-960MHz | 1695-2690MHz | 3300-3800MHz

Horizontal

External Document Links

Notes

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering