



**JUMPER-S12F-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 1/2" Superflexible Foam, with flame retardant jacket

Radio Frequency Systems' CELLFLEX® Factory-Fit Jumpers feature specially designed connectors which are soldered-on in a strictly controlled industrial process to ensure industry leading performance for today's high-performance wireless systems. The connector design and manufacturing process has been optimized to produce premium VSWR and IM levels. Injection molded boots provide reliable and repeatable additional sealing level and strain relief. Our facilities produce and stock all popular lengths as required by the industry, and can deliver custom lengths with premium VSWR and IM levels on request.



7M7FS12F-0400FFP for EXAMPLE

**FEATURES / BENEFITS**

- **Stable premium VSWR, outstanding and consistent intermodulation performance - 4.3-10 side not relying on coupling torque**  
Improves network performance, reduces the number of dropped calls and avoids revenue loss.
- **Waterproof to IP 68**  
No downtime risk, secures revenue.
- **Smaller connector footprint for 4.3-10**  
Enables tighter spacing of connections for antennas and RRHs.
- **Available with standard ""J"" or flame retardant ""JFN"" jacket types**  
Usable in all applications.
- **Compliant to RoHS (EU) and CRoHS (China)**  
Usable on a global basis.

**Technical features**

**STRUCTURE**

|             |  |  |
|-------------|--|--|
| Cable Type  |  | 1/2" Superflexible Foam  |
| Jumper Type |  | Factory-Fit (Premium)  |
| Dielectric  |  | Foam Polyethylene  |
| Gasket      |  | Silicone rubber  |
| Jacket      |  | JFN: halogen free, non corrosive, flame retardant, low smoke, polyolefin, Test methods for fire behaviour of cable :, IEC 60754-1/-2<br>halogen free, non corrosive, IEC 61034 low smoke emission, IEC 60332-1 flame retardant |

**MECHANICAL SPECIFICATIONS**

|                     |         |           |
|---------------------|---------|-----------|
| Minimum Bend Radius | mm (in) | 32 (1.25) |
|---------------------|---------|-----------|

**TESTING AND ENVIRONMENTAL**

|               |  |      |
|---------------|--|------|
| Sealing class |  | IP68 |
|---------------|--|------|

**TEMPERATURE SPECIFICATIONS**

|                          |         |                         |
|--------------------------|---------|-------------------------|
| Installation Temperature | °C (°F) | -25 to 60 (-13 to 140 ) |
| Operation Temperature    | °C (°F) | -50 to 85 (-58 to 185 ) |
| Storage Temperature      | °C (°F) | -70 to 85 (-94 to 185 ) |

**ELECTRICAL SPECIFICATIONS**

|                            |       |  |
|----------------------------|-------|--|
| Intermodulation, 3rd Order | dBc   | ≤ -159 static & dynamic (-161 typical) |
| Peak Power Rating          | kW    | 8.1                                    |
| RF Peak Voltage            | Volts | 900                                    |



**JUMPER-S12F-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 1/2" Superflexible Foam, with flame retardant jacket

**JUMPER VSWR 0 - 10 M**

| Frequency [MHz] | Straight / Straight [dB] (VSWR) | Right Angle / Right Angle [dB] (VSWR) |
|-----------------|---------------------------------|---------------------------------------|
| 0 - 1000        | >28.3 (≤1.08)                   | >28.3 (≤1.08)                         |
| >1000-1700      | >28.3 (≤1.08)                   | >26.4 (≤1.10)                         |
| >1700-2200      | >28.0 (≤1.08)                   | >26.4 (≤1.10)                         |
| >2200-2700      | >26.4 (≤1.10)                   | >24.9 (≤1.12)                         |
| >2700-3800      | >23.1 (≤1.15)                   | >20.8 (≤1.20)                         |
| >3800-5000      | >20.8 (≤1.20)                   | >19.1 (≤1.25)                         |
| >5000-6000      | >17.7 (≤1.30)                   | >17.7 (≤1.30)                         |

**JUMPER VSWR 10 - 20 M**

| Frequency [MHz] | Straight / Straight [dB] (VSWR) | Right Angle / Right Angle [dB] (VSWR) |
|-----------------|---------------------------------|---------------------------------------|
| 0 - 1000        | >28.3 (≤1.08)                   | >28.3 (≤1.08)                         |
| >1000-1700      | >26.4 (≤1.10)                   | >24.0 (≤1.14)                         |
| >1700-2200      | >26.4 (≤1.10)                   | >24.0 (≤1.14)                         |
| >2200-2700      | >24.9 (≤1.12)                   | >24.0 (≤1.14)                         |
| >2700-3800      | >23.1 (≤1.15)                   | >19.1 (≤1.25)                         |
| >3800-5000      | >19.1 (≤1.25)                   | >18.2 (≤1.28)                         |
| >5000-6000      | >17.7 (≤1.30)                   | >16.0 (≤1.38)                         |

**COMBINATIONS**

| Model Name         | Connector 1 | Connector 2             |
|--------------------|-------------|-------------------------|
| 7M7MS12F-XXXXFFP   | 7-16 Male   | 7-16 Male               |
| 7M7FS12F-XXXXFFP   | 7-16 Male   | 7-16 Female             |
| 7M7MRS12F-XXXXFFP  | 7-16 Male   | 7-16 Male Right Angle   |
| 7M43MS12F-XXXXFFP  | 7-16 Male   | 4.3-10 Male             |
| 7M43FS12F-XXXXFFP  | 7-16 Male   | 4.3-10 Female           |
| 7M43MRS12F-XXXXFFP | 7-16 Male   | 4.3-10 Male Right Angle |
| 7MNMS12F-XXXXFFP   | 7-16 Male   | N-Male                  |
| 7MNFS12F-XXXXFFP   | 7-16 Male   | N-Female                |
| 7MNMRS12F-XXXXFFP  | 7-16 Male   | N-Male Right Angle      |
| 7F7FS12F-XXXXFFP   | 7-16 Female | 7-16 Female             |
| 7F7MRS12F-XXXXFFP  | 7-16 Female | 7-16 Male Right Angle   |
| 7F43MS12F-XXXXFFP  | 7-16 Female | 4.3-10 Male             |
| 7F43FS12F-XXXXFFP  | 7-16 Female | 4.3-10 Female           |
| 7F43MRS12F-XXXXFFP | 7-16 Female | 4.3-10 Male Right Angle |
| 7FNMS12F-XXXXFFP   | 7-16 Female | N-Male                  |
| 7FNFS12F-XXXXFFP   | 7-16 Female | N-Female                |
| 7FNMRS12F-XXXXFFP  | 7-16 Female | N-Male Right Angle      |



**JUMPER-S12F-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 1/2" Superflexible Foam, with flame retardant jacket

|                      |                         |                         |
|----------------------|-------------------------|-------------------------|
| 7MR7MRS12F-XXXXFFP   | 7-16 Male Right Angle   | 7-16 Male Right Angle   |
| 7MR43MS12F-XXXXFFP   | 7-16 Male Right Angle   | 4.3-10 Male             |
| 7MR43FS12F-XXXXFFP   | 7-16 Male Right Angle   | 4.3-10 Female           |
| 7MR43MRS12F-XXXXFFP  | 7-16 Male Right Angle   | 4.3-10 Male Right Angle |
| 7MRNMS12F-XXXXFFP    | 7-16 Male Right Angle   | N-Male                  |
| 7MRNFS12F-XXXXFFP    | 7-16 Male Right Angle   | N-Female                |
| 7MRNMRS12F-XXXXFFP   | 7-16 Male Right Angle   | N-Male Right Angle      |
| 43M43MS12F-XXXXFFP   | 4.3-10 Male             | 4.3-10 Male             |
| 43M43FS12F-XXXXFFP   | 4.3-10 Male             | 4.3-10 Female           |
| 43M43MRS12F-XXXXFFP  | 4.3-10 Male             | 4.3-10 Male Right Angle |
| 43MNMS12F-XXXXFFP    | 4.3-10 Male             | N-Male                  |
| 43MNFS12F-XXXXFFP    | 4.3-10 Male             | N-Female                |
| 43MNMRS12F-XXXXFFP   | 4.3-10 Male             | N-Male Right Angle      |
| 43F43FS12F-XXXXFFP   | 4.3-10 Female           | 4.3-10 Female           |
| 43F43MRS12F-XXXXFFP  | 4.3-10 Female           | 4.3-10 Male Right Angle |
| 43FNMS12F-XXXXFFP    | 4.3-10 Female           | N-Male                  |
| 43FNFS12F-XXXXFFP    | 4.3-10 Female           | N-Female                |
| 43FNMRS12F-XXXXFFP   | 4.3-10 Female           | N-Male Right Angle      |
| 43MR43MRS12F-XXXXFFP | 4.3-10 Male Right Angle | 4.3-10 Male Right Angle |
| 43MRNMS12F-XXXXFFP   | 4.3-10 Male Right Angle | N-Male                  |
| 43MRNFS12F-XXXXFFP   | 4.3-10 Male Right Angle | N-Female                |
| 43MRNMRS12F-XXXXFFP  | 4.3-10 Male Right Angle | N-Male Right Angle      |
| NMNMS12F-XXXXFFP     | N-Male                  | N-Male                  |
| NMNFS12F-XXXXFFP     | N-Male                  | N-Female                |
| NMNMRS12F-XXXXFFP    | N-Male                  | N-Male Right Angle      |
| NFNFS12F-XXXXFFP     | N-Female                | N-Female                |
| NFNMRS12F-XXXXFFP    | N-Female                | N-Male Right Angle      |
| NMRNMRS12F-XXXXFFP   | N-Male Right Angle      | N-Male Right Angle      |
| 43FNXMS12F-XXXXFFP   | 4.3-10 Female           | NEX10 Male              |
| 43MNXMS12F-XXXXFFP   | 4.3-10 Male             | NEX10 Male              |
| 43MRNXMS12F-XXXXFFP  | 4.3-10 Male Right Angle | NEX10 Male              |
| 7FNXMS12F-XXXXFFP    | 7-16 Female             | NEX10 Male              |
| 7MNXMS12F-XXXXFFP    | 7-16 Male               | NEX10 Male              |
| 7MRNXMS12F-XXXXFFP   | 7-16 Male Right Angle   | NEX10 Male              |
| NFNXMS12F-XXXXFFP    | N-Female                | NEX10 Male              |
| NMNXMS12F-XXXXFFP    | N-Male                  | NEX10 Male              |



# JUMPER-S12F-FFP

CELLFLEX® Factory-Fit Jumper Assembly, 1/2" Superflexible Foam, with flame retardant jacket


|   |                       |                       |
|---|-----------------------|-----------------------|
| <b>NMRNXMS12F-XXXXFFP</b>   | N-Male Right Angle    | NEX10 Male            |
| <b>XXXX in the model name is the length; as well for jumper with boots acc. to nomenclature</b> | (Boot examples below) | (Boot examples below) |
| <b>43MB43MBS12F-XXXXFFP</b>   | 4.3-10 Male + Boot    | 4.3-10 Male + Boot    |
| <b>7MB7MBS12F-XXXXFFP</b>   | 7-16 Male + Boot      | 7-16 Male + Boot      |
| <b>NMBNMBS12F-XXXXFFP</b>   | N-Male + Boot         | N-Male + Boot         |



**JUMPER-S12F-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 1/2" Superflexible Foam, with flame retardant jacket

**RFS JUMPER MODEL NOMENCLATURE**

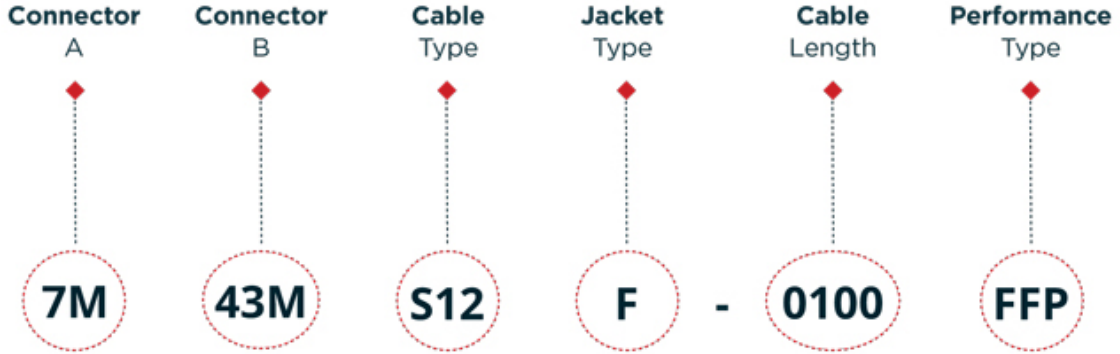

**7M & 43M  
CONNECTORS  
A & B**

|             |                               |
|-------------|-------------------------------|
| <b>7M</b>   | 7-16 Male                     |
| <b>7F</b>   | 7-16 Female                   |
| <b>7MR</b>  | 7-16 Male Right Angle         |
| <b>43M</b>  | 4.3-10 Male                   |
| <b>43F</b>  | 4.3-10 Female                 |
| <b>43MH</b> | 4.3-10 Male Handscrew         |
| <b>43MP</b> | 4.3-10 Male Push Pull         |
| <b>43MR</b> | 4.3-10 Male Right Angle       |
| <b>NM</b>   | N-Type Male                   |
| <b>NF</b>   | N-Type Female                 |
| <b>NMR</b>  | N-Type Male Right Angle       |
| <b>NXM</b>  | NEX10 Male                    |
| <b>NXMP</b> | NEX10 Male Push Pull          |
| <b>7MB</b>  | 7-16 Male with Weatherboots   |
| <b>43MB</b> | 4.3-10 Male with Weatherboots |
| <b>NMB</b>  | N-Type Male with Weatherboots |

**S12  
CABLE  
TYPE**

|            |                         |
|------------|-------------------------|
| <b>L38</b> | 3/8" Low Loss Coax      |
| <b>L12</b> | 1/2" Low Loss Coax      |
| <b>S14</b> | 1/4" Superflexible Coax |
| <b>S38</b> | 3/8" Superflexible Coax |
| <b>S12</b> | 1/2" Superflexible Coax |

**F  
JACKET  
TYPE**

|              |                     |
|--------------|---------------------|
| <b>F</b>     | JFN Flame Retardant |
| <b>Blank</b> | PE                  |

**0100  
CABLE  
LENGTH\***

|             |           |
|-------------|-----------|
| <b>0100</b> | 1 meter   |
| <b>0200</b> | 2 meter   |
| <b>0250</b> | 2.5 meter |
| <b>1000</b> | 10 meter  |
| <b>1500</b> | 15 meter  |
| <b>030</b>  | 3 feet    |
| <b>060</b>  | 6 feet    |
| <b>100</b>  | 10 feet   |
| <b>150</b>  | 15 feet   |
| <b>200</b>  | 20 feet   |

**FFP  
JUMPER  
PERFORMANCE**

|             |  |
|-------------|--|
| <b>FFP</b>  | Factory-Fit Premium                    |
| <b>FFPB</b> | Factory-Fit Premium; Bird-Proof Option |
| <b>FFS</b>  | Factory-Fit Standard                   |
| <b>UPM</b>  | Ultra PIM Performance                  |

**NOTES:**  
\* 4 digits indicate meter length, 3 digits indicate feet length  
Others lengths available on request



## JUMPER-S12F-FFP

CELLFLEX® Factory-Fit Jumper Assembly, 1/2" Superflexible Foam, with flame retardant jacket

### External Document Links

[Cable SCF12-50JFN](#)

[Handling instruction](#)

[Jumper Brochure](#)

### Notes