



**JUMPER-S12F-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 1/2" Superflexible Foam, with flame retardant jacket

Radio Frequency Systems' CELLFLEX® Factory-Fit Jumpers feature specially designed connectors which are soldered-on in a strictly controlled industrial process to ensure industry leading performance for today's high-performance wireless systems. The connector design and manufacturing process has been optimized to produce premium VSWR and IM levels. Injection molded boots provide reliable and repeatable additional sealing level and strain relief. Our facilities produce and stock all popular lengths as required by the industry, and can deliver custom lengths with premium VSWR and IM levels on request.



7M7FS12F-0400FFP for EXAMPLE

**FEATURES / BENEFITS**

- **Stable premium VSWR, outstanding and consistent intermodulation performance - 4.3-10 side not relying on coupling torque**  
Improves network performance, reduces the number of dropped calls and avoids revenue loss.
- **Waterproof to IP 68**  
No downtime risk, secures revenue.
- **Smaller connector footprint for 4.3-10**  
Enables tighter spacing of connections for antennas and RRHs.
- **Available with standard ""J"" or flame retardant ""JFN"" jacket types**  
Usable in all applications.
- **Compliant to RoHS (EU) and CRoHS (China)**  
Usable on a global basis.

**Technical features**

**STRUCTURE**

Cable Type		1/2" Superflexible Foam
Jumper Type		Factory-Fit (Premium)
Dielectric		Foam Polyethylene
Gasket		Silicone rubber
Jacket		JFN: halogen free, non corrosive, flame retardant, low smoke, polyolefin, Test methods for fire behaviour of cable :, IEC 60754-1/-2 halogen free, non corrosive, IEC 61034 low smoke emission, IEC 60332-1 flame retardant

**MECHANICAL SPECIFICATIONS**

Minimum Bend Radius	mm (in)	32 (1.25)
---------------------	---------	-----------

**TESTING AND ENVIRONMENTAL**

Sealing class		IP68
---------------	--	------

**TEMPERATURE SPECIFICATIONS**

Installation Temperature	°C (°F)	-25 to 60 (-13 to 140 )
Operation Temperature	°C (°F)	-50 to 85 (-58 to 185 )
Storage Temperature	°C (°F)	-70 to 85 (-94 to 185 )

**ELECTRICAL SPECIFICATIONS**

Intermodulation, 3rd Order	dBc	≤ -159 static & dynamic (-161 typical)
Peak Power Rating	kW	8.1
RF Peak Voltage	Volts	900



**JUMPER-S12F-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 1/2" Superflexible Foam, with flame retardant jacket

**JUMPER VSWR 0 - 10 M**

Frequency [MHz]	Straight / Straight [dB] (VSWR)	Right Angle / Right Angle [dB] (VSWR)
0 - 1000	>28.3 (≤1.08)	>28.3 (≤1.08)
>1000-1700	>28.3 (≤1.08)	>26.4 (≤1.10)
>1700-2200	>28.0 (≤1.08)	>26.4 (≤1.10)
>2200-2700	>26.4 (≤1.10)	>24.9 (≤1.12)
>2700-3800	>23.1 (≤1.15)	>20.8 (≤1.20)
>3800-5000	>20.8 (≤1.20)	>19.1 (≤1.25)
>5000-6000	>17.7 (≤1.30)	>17.7 (≤1.30)

**JUMPER VSWR 10 - 20 M**

Frequency [MHz]	Straight / Straight [dB] (VSWR)	Right Angle / Right Angle [dB] (VSWR)
0 - 1000	>28.3 (≤1.08)	>28.3 (≤1.08)
>1000-1700	>26.4 (≤1.10)	>24.0 (≤1.14)
>1700-2200	>26.4 (≤1.10)	>24.0 (≤1.14)
>2200-2700	>24.9 (≤1.12)	>24.0 (≤1.14)
>2700-3800	>23.1 (≤1.15)	>19.1 (≤1.25)
>3800-5000	>19.1 (≤1.25)	>18.2 (≤1.28)
>5000-6000	>17.7 (≤1.30)	>16.0 (≤1.38)

**COMBINATIONS**

Model Name	Connector 1	Connector 2
7M7MS12F-XXXXFFP	7-16 Male	7-16 Male
7M7FS12F-XXXXFFP	7-16 Male	7-16 Female
7M7MRS12F-XXXXFFP	7-16 Male	7-16 Male Right Angle
7M43MS12F-XXXXFFP	7-16 Male	4.3-10 Male
7M43FS12F-XXXXFFP	7-16 Male	4.3-10 Female
7M43MRS12F-XXXXFFP	7-16 Male	4.3-10 Male Right Angle
7MNMS12F-XXXXFFP	7-16 Male	N-Male
7MNF12F-XXXXFFP	7-16 Male	N-Female
7MNMRS12F-XXXXFFP	7-16 Male	N-Male Right Angle
7F7FS12F-XXXXFFP	7-16 Female	7-16 Female
7F7MRS12F-XXXXFFP	7-16 Female	7-16 Male Right Angle
7F43MS12F-XXXXFFP	7-16 Female	4.3-10 Male
7F43FS12F-XXXXFFP	7-16 Female	4.3-10 Female
7F43MRS12F-XXXXFFP	7-16 Female	4.3-10 Male Right Angle
7FNMS12F-XXXXFFP	7-16 Female	N-Male
7FNFS12F-XXXXFFP	7-16 Female	N-Female
7FNMRS12F-XXXXFFP	7-16 Female	N-Male Right Angle



**JUMPER-S12F-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 1/2" Superflexible Foam, with flame retardant jacket

7MR7MRS12F-XXXXFFP	7-16 Male Right Angle	7-16 Male Right Angle
7MR43MS12F-XXXXFFP	7-16 Male Right Angle	4.3-10 Male
7MR43FS12F-XXXXFFP	7-16 Male Right Angle	4.3-10 Female
7MR43MRS12F-XXXXFFP	7-16 Male Right Angle	4.3-10 Male Right Angle
7MRNMS12F-XXXXFFP	7-16 Male Right Angle	N-Male
7MRNFS12F-XXXXFFP	7-16 Male Right Angle	N-Female
7MRNMRS12F-XXXXFFP	7-16 Male Right Angle	N-Male Right Angle
43M43MS12F-XXXXFFP	4.3-10 Male	4.3-10 Male
43M43FS12F-XXXXFFP	4.3-10 Male	4.3-10 Female
43M43MRS12F-XXXXFFP	4.3-10 Male	4.3-10 Male Right Angle
43MNMS12F-XXXXFFP	4.3-10 Male	N-Male
43MNFS12F-XXXXFFP	4.3-10 Male	N-Female
43MNMRS12F-XXXXFFP	4.3-10 Male	N-Male Right Angle
43F43FS12F-XXXXFFP	4.3-10 Female	4.3-10 Female
43F43MRS12F-XXXXFFP	4.3-10 Female	4.3-10 Male Right Angle
43FNMS12F-XXXXFFP	4.3-10 Female	N-Male
43FNFS12F-XXXXFFP	4.3-10 Female	N-Female
43FNMRS12F-XXXXFFP	4.3-10 Female	N-Male Right Angle
43MR43MRS12F-XXXXFFP	4.3-10 Male Right Angle	4.3-10 Male Right Angle
43MRNMS12F-XXXXFFP	4.3-10 Male Right Angle	N-Male
43MRNFS12F-XXXXFFP	4.3-10 Male Right Angle	N-Female
43MRNMRS12F-XXXXFFP	4.3-10 Male Right Angle	N-Male Right Angle
NMNMS12F-XXXXFFP	N-Male	N-Male
NMNFS12F-XXXXFFP	N-Male	N-Female
NMNMRS12F-XXXXFFP	N-Male	N-Male Right Angle
NFNFS12F-XXXXFFP	N-Female	N-Female
NFNMRS12F-XXXXFFP	N-Female	N-Male Right Angle
NMRNMRS12F-XXXXFFP	N-Male Right Angle	N-Male Right Angle
43FNXMS12F-XXXXFFP	4.3-10 Female	NEX10 Male
43MNXMS12F-XXXXFFP	4.3-10 Male	NEX10 Male
43MRNXMS12F-XXXXFFP	4.3-10 Male Right Angle	NEX10 Male
7FNXMS12F-XXXXFFP	7-16 Female	NEX10 Male
7MNXMS12F-XXXXFFP	7-16 Male	NEX10 Male
7MRNXMS12F-XXXXFFP	7-16 Male Right Angle	NEX10 Male
NFNXMS12F-XXXXFFP	N-Female	NEX10 Male
NMNXMS12F-XXXXFFP	N-Male	NEX10 Male



# JUMPER-S12F-FFP

CELLFLEX® Factory-Fit Jumper Assembly, 1/2" Superflexible Foam, with flame retardant jacket


<b>NMRNXMS12F-XXXXFFP</b>	N-Male Right Angle	NEX10 Male
<b>XXXX in the model name is the length; as well for jumper with boots acc. to nomenclature</b>	(Boot examples below)	(Boot examples below)
<b>43MB43MBS12F-XXXXFFP</b>	4.3-10 Male + Boot	4.3-10 Male + Boot
<b>7MB7MBS12F-XXXXFFP</b>	7-16 Male + Boot	7-16 Male + Boot
<b>NMBNMBS12F-XXXXFFP</b>	N-Male + Boot	N-Male + Boot



**JUMPER-S12F-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 1/2" Superflexible Foam, with flame retardant jacket

**RFS JUMPER MODEL NOMENCLATURE**

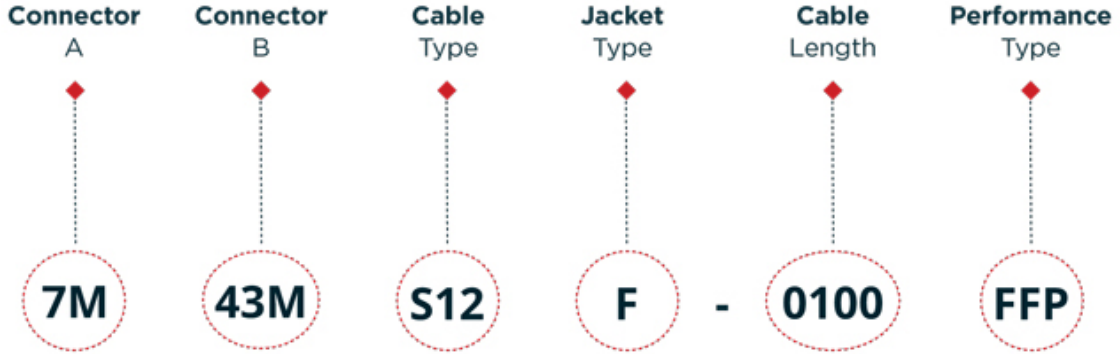

**7M & 43M  
CONNECTORS  
A & B**

<b>7M</b>	7-16 Male
<b>7F</b>	7-16 Female
<b>7MR</b>	7-16 Male Right Angle
<b>43M</b>	4.3-10 Male
<b>43F</b>	4.3-10 Female
<b>43MH</b>	4.3-10 Male Handscrew
<b>43MP</b>	4.3-10 Male Push Pull
<b>43MR</b>	4.3-10 Male Right Angle
<b>NM</b>	N-Type Male
<b>NF</b>	N-Type Female
<b>NMR</b>	N-Type Male Right Angle
<b>NXM</b>	NEX10 Male
<b>NXMP</b>	NEX10 Male Push Pull
<b>7MB</b>	7-16 Male with Weatherboots
<b>43MB</b>	4.3-10 Male with Weatherboots
<b>NMB</b>	N-Type Male with Weatherboots

**S12  
CABLE  
TYPE**

<b>L38</b>	3/8" Low Loss Coax
<b>L12</b>	1/2" Low Loss Coax
<b>S14</b>	1/4" Superflexible Coax
<b>S38</b>	3/8" Superflexible Coax
<b>S12</b>	1/2" Superflexible Coax

**F  
JACKET  
TYPE**

<b>F</b>	JFN Flame Retardant
<b>Blank</b>	PE

**0100  
CABLE  
LENGTH\***

<b>0100</b>	1 meter
<b>0200</b>	2 meter
<b>0250</b>	2.5 meter
<b>1000</b>	10 meter
<b>1500</b>	15 meter
<b>030</b>	3 feet
<b>060</b>	6 feet
<b>100</b>	10 feet
<b>150</b>	15 feet
<b>200</b>	20 feet

**FFP  
JUMPER  
PERFORMANCE**

<b>FFP</b>	Factory-Fit Premium
<b>FFPB</b>	Factory-Fit Premium; Bird-Proof Option
<b>FFS</b>	Factory-Fit Standard
<b>UPM</b>	Ultra PIM Performance

**NOTES:**  
\* 4 digits indicate meter length, 3 digits indicate feet length  
Others lengths available on request



PRODUCT DATASHEET

## JUMPER-S12F-FFP

CELLFLEX® Factory-Fit Jumper Assembly, 1/2" Superflexible Foam, with flame retardant jacket

### External Document Links

[Cable SCF12-50JFN](#)

[Handling instruction](#)

[Jumper Brochure](#)

### Notes