



JUMPER-S14F-FFP

CELLFLEX® Factory-Fit Jumper Assembly, 1/4" Superflexible Foam, with flame retardant jacket

Radio Frequency Systems' CELLFLEX® Factory-Fit Jumpers feature specially designed connectors which are soldered-on in a strictly controlled industrial process to ensure industry leading performance for today's high-performance wireless systems. The connector design and manufacturing process has been optimized to produce premium VSWR and IM levels. Injection molded boots provide reliable and repeatable additional sealing level and strain relief. Our facilities produce and stock all popular lengths as required by the industry, and can deliver custom lengths with premium VSWR and IM levels on request.



f. e. 43M43MS14-0100FFP

FEATURES / BENEFITS

- **Stable premium VSWR, outstanding and consistent intermodulation performance - 4.3-10 side not relying on coupling torque**
Improves network performance, reduces the number of dropped calls and avoids revenue loss.
- **Waterproof to IP 68**
No downtime risk, secures revenue.
- **Smaller connector footprint for 4.3-10**
Enables tighter spacing of connections for antennas and RRHs.
- **Available with standard ""J"" or flame retardant ""JFN"" jacket types**
Usable in all applications.
- **Compliant to RoHS (EU) and CRoHS (China)**
Usable on a global basis.

Technical features

STRUCTURE

Cable Type		1/4" Superflexible Foam
Jumper Type		Factory-Fit (Premium)
Dielectric		Foam Polyethylene
Gasket		Silicone rubber
Jacket		JFN: halogen free, non corrosive, flame retardant, low smoke, polyolefin, Test methods for fire behaviour of cable: IEC 60754-1/-2 halogen free and non corrosive, IEC 61034 low smoke emission, IEC 60332-1 flame retardant

MECHANICAL SPECIFICATIONS

Minimum Bend Radius	mm (in)	25 (0.98)
---------------------	---------	-----------

TESTING AND ENVIRONMENTAL

Sealing class		IP68
---------------	--	------

TEMPERATURE SPECIFICATIONS

Installation Temperature	°C (°F)	-25 to 60 (-13 to 140)
Operation Temperature	°C (°F)	-50 to 85 (-58 to 185)
Storage Temperature	°C (°F)	-70 to 85 (-94 to 185)

ELECTRICAL SPECIFICATIONS

Intermodulation, 3rd Order	dBc	≤ -162 static & -159 dynamic
Peak Power Rating	kW	5.5
RF Peak Voltage	Volts	740



JUMPER-S14F-FFP

CELLFLEX® Factory-Fit Jumper Assembly, 1/4" Superflexible Foam, with flame retardant jacket

JUMPER RETURN LOSS (VSWR), 0-30FT LENGTH

Frequency [MHz]	Straight / Straight [dB]	Right Angle / Right Angle [dB]
0 - 1000	>28.3	>28.3
>1000-1700	>28.3	>24.4
>1700-2200	>28.3	>24.4
>2200-2700	>26.4	>23.0
>2700-3800	>23.1	>19.5
>3800-5000	>20.8	>18.1
>5000-6000	>17.7	>17.0

JUMPER RETURN LOSS (VSWR), 31-60FT LENGTH

Frequency [MHz]	Straight / Straight [dB]	Right Angle / Right Angle [dB]
0 - 1000	>28.3	>28.3
>1000-1700	>26.4	>22.0
>1700-2200	>26.4	>22.0
>2200-2700	>24.9	>22.0
>2700-3800	>23.1	>17.0
>3800-5000	>19.1	>16.0
>5000-6000	>17.7	>15.0

COMBINATIONS


Model Name	Connector 1	Connector 2
43M43MS14F-XXXXFFP	4.3-10 Male	4.3-10 Male
43M43MRS14F-XXXXFFP	4.3-10 Male	4.3-10 Male Right Angle
43MR43MRS14F-XXXXFFP	4.3-10 Male Right Angle	4.3-10 Male Right Angle
43MNXMS14F-XXXXFFP	4.3-10 Male	NEX10-Male
NXMNXMS14F-XXXXFFP	NEX10-Male	NEX10-Male
43MRNXMS14F-XXXXFFP	4.3-10 Male Right Angle	NEX10-Male
XXXX in the model name is the length; as well for jumper with boots acc. to nomenclature		



JUMPER-S14F-FFP

CELLFLEX® Factory-Fit Jumper Assembly, 1/4" Superflexible Foam, with flame retardant jacket

RFS JUMPER MODEL NOMENCLATURE

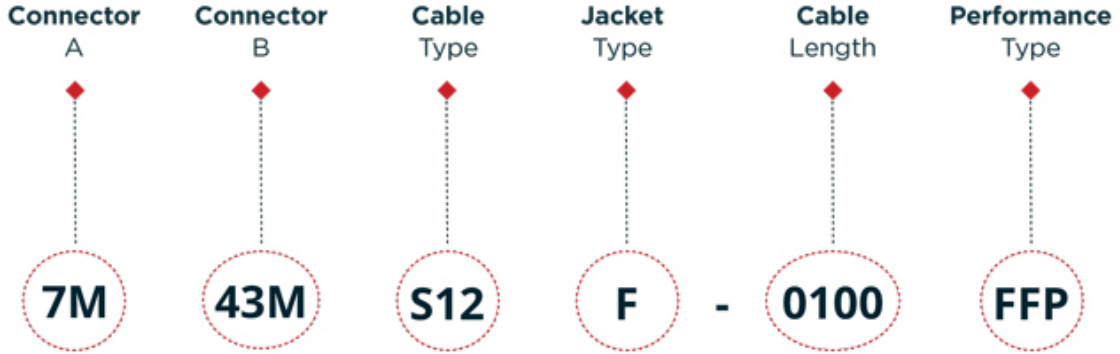

**7M & 43M
CONNECTORS
A & B**

7M	7-16 Male
7F	7-16 Female
7MR	7-16 Male Right Angle
43M	4.3-10 Male
43F	4.3-10 Female
43MH	4.3-10 Male Handscrew
43MP	4.3-10 Male Push Pull
43MR	4.3-10 Male Right Angle
NM	N-Type Male
NF	N-Type Female
NMR	N-Type Male Right Angle
NXM	NEX10 Male
NXMP	NEX10 Male Push Pull
7MB	7-16 Male with Weatherboots
43MB	4.3-10 Male with Weatherboots
NMB	N-Type Male with Weatherboots

**S12
CABLE
TYPE**

L38	3/8" Low Loss Coax
L12	1/2" Low Loss Coax
S14	1/4" Superflexible Coax
S38	3/8" Superflexible Coax
S12	1/2" Superflexible Coax

**F
JACKET
TYPE**

F	JFN Flame Retardant
Blank	PE

**0100
CABLE
LENGTH***

0100	1 meter
0200	2 meter
0250	2.5 meter
1000	10 meter
1500	15 meter
030	3 feet
060	6 feet
100	10 feet
150	15 feet
200	20 feet

**FFP
JUMPER
PERFORMANCE**

FFP	Factory-Fit Premium
FFPB	Factory-Fit Premium; Bird-Proof Option
FFS	Factory-Fit Standard
UPM	Ultra PIM Performance

NOTES:
* 4 digits indicate meter length, 3 digits indicate feet length
Others lengths available on request



PRODUCT DATASHEET

JUMPER-S14F-FFP

CELLFLEX® Factory-Fit Jumper Assembly, 1/4" Superflexible Foam, with flame retardant jacket

External Document Links

[Cable SCF14-50JFN](#)

[Handling instruction](#)

[Jumper Brochure](#)

Notes