




# KRTS4-3C

Three-way Snap-in Stand-off with round member adapter for 51-102mm (2-4") round members

Three-way stainless steel standoff adapter for mounting of up to 3 snap-in hangers. Has three 19mm (3/4in) holes. Stainless steel round member adapter 51-102mm (2-4in) and hardware kit included

### FEATURES / BENEFITS

- Constructed of heavy stainless steel
- The stand-offs provide 1-1/4" (30 mm) tower clearance to hangers when running waveguide over tower cross members, flanges and other tower obstacles.
- The kit consists of ten stainless steel tower stand-offs with stainless steel hardware.
- Use with Threaded Rod Kit for additional tower clearance.

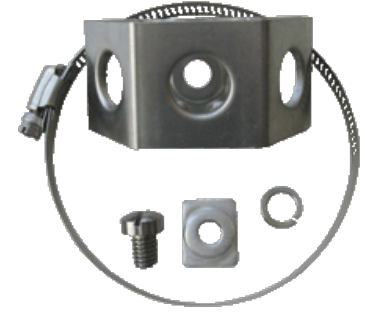

Stand-off Kit KRTS4-3C

## Technical features

### STRUCTURE

|                            |  |  |                 |
|----------------------------|--|--|-----------------|
| Product Line               |  | Elliptical Waveguide Accessories<br>Coaxial Cable Accessories  |                 |
| Product Type               |  | Installation Hardware  |                 |
| Installation Hardware Type |  | Round Member Tower Stand-off Kit   |                 |
| Coaxial Cable Type         |  | Air Dielectric   | Foam Dielectric |
| Hardware Kit               |  | 1x tapped insert with 3/8" threaded hole<br>1x Screw 3/8" x 3/4" <b>1x Spring washer</b><br><b>1x Round Member Adapter</b> |                 |

### MECHANICAL SPECIFICATIONS

|                       |         |                      |  |
|-----------------------|---------|----------------------|--|
| Insert Holes          |         | 3x 19mm (3/4") holes |  |
| Tower Member Diameter | mm (in) | 51 - 102 (2 - 4)     |  |
| Material              |         | Stainless Steel      |  |

### TEMPERATURE SPECIFICATIONS

|                          |         |                        |  |
|--------------------------|---------|------------------------|--|
| Installation Temperature | °C (°F) | -50 to 85 (-58 to 185) |  |
| Operation Temperature    | °C (°F) | -50 to 85 (-58 to 185) |  |
| Storage Temperature      | °C (°F) | -50 to 85 (-58 to 185) |  |

### PACKAGING INFORMATION

|                  |         |             |  |
|------------------|---------|-------------|--|
| Package Quantity |         | 10          |  |
| Weight per kit   | kg (lb) | 0.58 (1.28) |  |

[External Document Links](#)

[Notes](#)