



Single Multi block hanger support systems are designed for organizing bundled runs of coax cable. Each space-saving block securely holds one run of coax, allowing a compact bundle of up to 3x runs to be supported by stacking three blocks.

**FEATURES / BENEFITS**

- Single Multi Blocks are manufactured of polypropylene providing thermal, chemical and UV resistance in all environments.
- They come including angle member adapter and necessary hardware.
- The angle member adapter fastens the clamp to the tower without drilling.
- The angle member adapter includes a tower member set screw.
- The hanger mounting rod may be located in either of two mounting holes, depending on orientation of the fixing member.
- Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.



picture shows MBHS78-3-F for illustration purpose

**Technical features**

**GENERAL SPECIFICATIONS**

<b>Product Line</b>		Coaxial Cable Accessories
<b>Product Type</b>		Hanger
<b>Hanger Type</b>		Single Multi-block
<b>Transmission Line Type</b>		LCF158
<b>Cable Type</b>		Coaxial Foam Dielectric
<b>Color</b>		Black

**MECHANICAL SPECIFICATIONS**

<b>Cable Size</b>		1-5/8
<b>Number of Cable / Waveguide Runs</b>		1 per layer, 3 layers, 3 runs
<b>Configuration</b>		incl. Angle member adapter
<b>Angle member adapter clamping range mm (in)</b>		4 / 24 (0.157 / 0.945 )
<b>Angle member adppter threads</b>		2x M8
<b>Material</b>		Metal part: Stainless steel Plastic parts: Polypropylene
<b>Length</b>	mm (in)	324 (12.75) see picture below (L)
<b>Height</b>	mm (in)	92 (3.62) see picture below (H)
<b>Width</b>	mm (in)	54 (2.13) see picture below (W)
<b>Recommended / Maximum Clamp Spacing</b>	m (ft)	0.7 / 1.5 (2.2 / 5)

**TEMPERATURE SPECIFICATIONS**

<b>Operation Temperature</b>	°C (°F)	-50 to 85 (-58 to 185 )
<b>Storage Temperature</b>	°C (°F)	-50 to 85 (-58 to 185 )




### MBHS158-3-F

Single Multi-block hanger, with angle member adapter

#### PACKAGING INFORMATION

Package Quantity		10
Weight per piece	kg (lb)	0.38 (0.83)
Weight per kit	kg (lb)	4 (8.81)

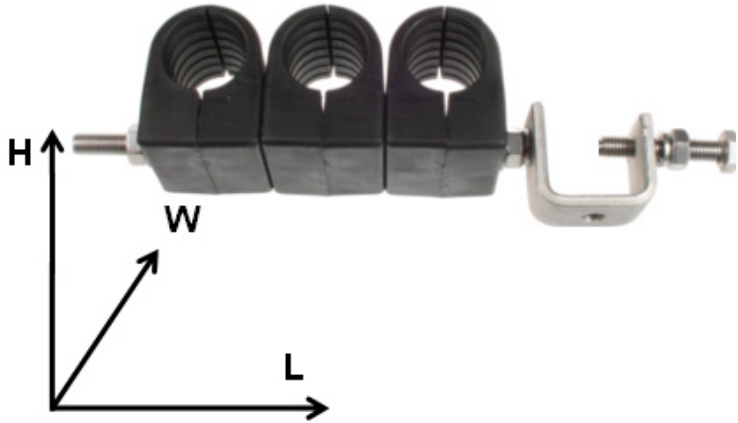

picture shows MBHS78-3-F for illustration purpose

#### External Document Links

[Installation Instruction](#)

#### Notes

For applications under wind speed conditions from 160 km/h (100 mph) up to 200 km/h (125 mph) a maximum clamp spacing of 0.7m (2.3 ft) must not be exceeded.