PRODUCT DATASHEET

NADP120-D-1-B


Waveguide to N Female Coax Adapter PDR120

N-Adapter to PDR120, female
gasket and screw kit enclosure

FEATURES / BENEFITS

Waveguide installation

- The rectangular waveguide component provides simple installation in particular difficult cases
- The flange adapter provides proper matching of rectangular waveguide flanges to N-female connector
- It provides outstanding electrical performance

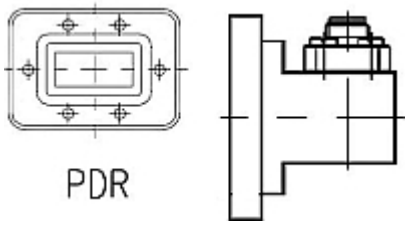

Coax transition for R120 and smaller waveguides

Technical features

STRUCTURE		
Type of Rectangular Waveguide Component		Waveguide to Type N Female Coax Adapter
Waveguide Size IEC (EIA)		R120 (WR75)
Coaxial Interface		N-female
Flange		PDR120
Flange Finish		Brass un-plated
ELECTRICAL SPECIFICATIONS		
Frequency Range	GHz	9.84 - 15
Minimum Return Loss (max. VSWR)	dB (VSWR)	23.1 (1.15)
MATERIAL		
Material		Brass
Color		Black
PACKAGING INFORMATION		
Package Quantity		1

External Document Links

Notes

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering