
PRODUCT DATASHEET

# NADP137-C-1-O

Waveguide to N Female Coax Adapter WR137-CPR137G

Maximum VSWR 1.25:1 over waveguide band.

FEATURES / BENEFITS

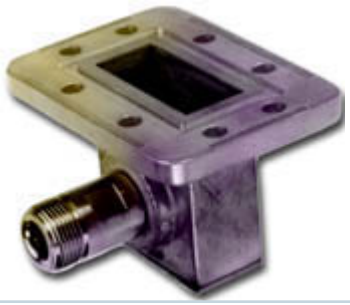

## Technical features

| | | |
|---|---|---|
| **STRUCTURE** | | |
| **Type of Rectangular Waveguide Component** | | Waveguide to Type N Female Coax Adapter |
| **Waveguide Size IEC (EIA)** | | R70 (WR137) |
| **Coaxial Interface** | | N-female |
| **Flange** | | CPR137G |
| **Flange Finish** | | CPR137G |
| **ELECTRICAL SPECIFICATIONS** | | |
| **Minimum Return Loss (max. VSWR)** | dB (VSWR) | 19.1 (1.25) |
| **MATERIAL** | | |
| **Material** | | Brass |
| **PACKAGING INFORMATION** | | |
| **Package Quantity** | | 1 |

External Document Links

Notes



All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering