



### NF-LCF114-E01

## N Female Connector for 1-1/4" Coaxial Cable, OMNI FIT™ Premium, Straight, O-Ring and compression sealing

OMNI FIT™ high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminium) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment. All RFS Technologies connectors are fully tested for mechanical and electrical compliance to industry specifications.

The N connector meets all technical requirements and covers high frequencies as well as legacy applications. Sealing against outer conductor and jacket by means of O-Ring and 360° compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket.



OMNI FIT™ Premium Connectors

#### FEATURES / BENEFITS

- Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction
- Two-piece design i.e. visual inspection of interlocking leads to improved installation security
- OMNI FIT™ concept i.e. streamlined order management and reduced stock level
- Watertight sealing in mated and unmated condition, i.e. reduced efforts during installation and improved security during operation
- Unique NiTin plating i.e. extreme resistance against corrosion even under hardest climatic and environmental circumstances
- Multi-thread (Tristart) design i.e. simplified and accelerated tightening process
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis

### Technical features

#### GENERAL SPECIFICATIONS

Transmission Line Type		Coaxial Cable
Cable Size		1-1/4
Cable Type		Foam Dielectric
Model Series		UCF114-50 Series, LCFS114-50 Series, RCF114-50 Series
Connector Interface		N
Connector Type		OMNI FIT™ PREMIUM Straight
Sealing Method		O-Ring + 360° Compression
Gender		Female

#### ELECTRICAL SPECIFICATIONS

Nominal Impedance, ohms	Ohm	50
3rd Order IM Product @ 2x20 Watts	dBc	-156 ; typical -162
Maximum Frequency	GHz	3.8
VSWR, Return Loss	VSWR (dB)	0 &lt; f ≤ 1.0 GHz: 1.02 (40) 1.0 &lt; f ≤ 2.2 GHz: 1.04 (34) 2.2 &lt; f ≤ 2.7 GHz: 1.06 (31) 2.7 &lt; f ≤ 3.8 GHz: 1.08 (28)



**NF-LCF114-E01**

N Female Connector for 1-1/4" Coaxial Cable, OMNI FIT™ Premium,  
Straight, O-Ring and compression sealing

**MECHANICAL SPECIFICATIONS**


<b>Plating Outer/Inner</b>		Tri metal alloy/Silver
<b>Length</b>	mm (in)	81.7 (3.217)
<b>Outer Diameter</b>	mm (in)	51 (2.008)
<b>Inner Contact Attachment</b>		Spring Finger
<b>Outer Contact Attachment</b>		360° clamping

**ACCESSORIES**

<b>Poly Hook Spanner</b>	mm (in)	PHS 60-90-5 Ø 60-90 (2.3-3.5) Pin 5 (0.2)
<b>Trimming Tool</b>		TRIM-SET-L114-D01 TRIM-LCF114-D01-A

**TESTING AND ENVIRONMENTAL**

<b>Waterproof Level</b>		IP68
-------------------------	--	------

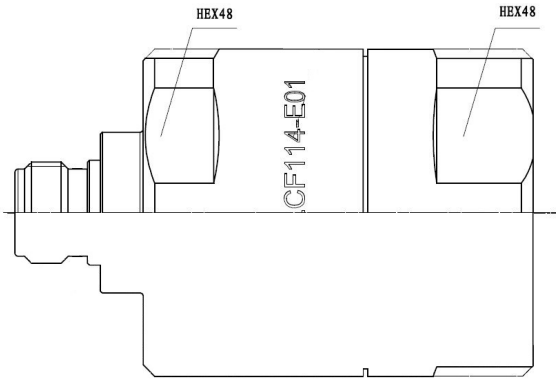

[External Document Links](#)  
[Installation Instruction](#)

[Notes](#)