



NF-LCF114-E01

N Female Connector for 1-1/4" Coaxial Cable, OMNI FIT™ Premium, Straight, O-Ring and compression sealing

OMNI FIT™ high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminium) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment. All RFS Technologies connectors are fully tested for mechanical and electrical compliance to industry specifications.

The N connector meets all technical requirements and covers high frequencies as well as legacy applications. Sealing against outer conductor and jacket by means of O-Ring and 360° compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket.



OMNI FIT™ Premium Connectors

FEATURES / BENEFITS

- Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction
- Two-piece design i.e. visual inspection of interlocking leads to improved installation security
- OMNI FIT™ concept i.e. streamlined order management and reduced stock level
- Watertight sealing in mated and unmated condition, i.e. reduced efforts during installation and improved security during operation
- Unique NiTin plating i.e. extreme resistance against corrosion even under hardest climatic and environmental circumstances
- Multi-thread (Tristart) design i.e. simplified and accelerated tightening process
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis

Technical features

GENERAL SPECIFICATIONS

| | | |
|-------------------------------|--|---|
| Transmission Line Type | | Coaxial Cable |
| Cable Size | | 1-1/4 |
| Cable Type | | Foam Dielectric |
| Model Series | | UCF114-50 Series, LCFS114-50 Series, RCF114-50 Series |
| Connector Interface | | N |
| Connector Type | | OMNI FIT™ PREMIUM Straight |
| Sealing Method | | O-Ring + 360° Compression |
| Gender | | Female |

ELECTRICAL SPECIFICATIONS

| | | |
|--|-----------|--|
| Nominal Impedance, ohms | Ohm | 50 |
| 3rd Order IM Product @ 2x20 Watts | dBc | -156 ; typical -162 |
| Maximum Frequency | GHz | 3.8 |
| VSWR, Return Loss | VSWR (dB) | 0 < f ≤ 1.0 GHz: 1.02 (40) 1.0 < f ≤ 2.2 GHz: 1.04 (34) 2.2 < f ≤ 2.7 GHz: 1.06 (31) 2.7 < f ≤ 3.8 GHz: 1.08 (28) |



NF-LCF114-E01

N Female Connector for 1-1/4" Coaxial Cable, OMNI FIT™ Premium,
Straight, O-Ring and compression sealing

MECHANICAL SPECIFICATIONS


| | | |
|---------------------------------|---------|------------------------|
| Plating Outer/Inner | | Tri metal alloy/Silver |
| Length | mm (in) | 81.7 (3.217) |
| Outer Diameter | mm (in) | 51 (2.008) |
| Inner Contact Attachment | | Spring Finger |
| Outer Contact Attachment | | 360° clamping |

ACCESSORIES

| | | |
|--------------------------|---------|---|
| Poly Hook Spanner | mm (in) | PHS 60-90-5 Ø 60-90 (2.3-3.5) Pin 5 (0.2) |
| Trimming Tool | | TRIM-SET-L114-D01 TRIM-LCF114-D01-A |

TESTING AND ENVIRONMENTAL

| | | |
|-------------------------|--|------|
| Waterproof Level | | IP68 |
|-------------------------|--|------|

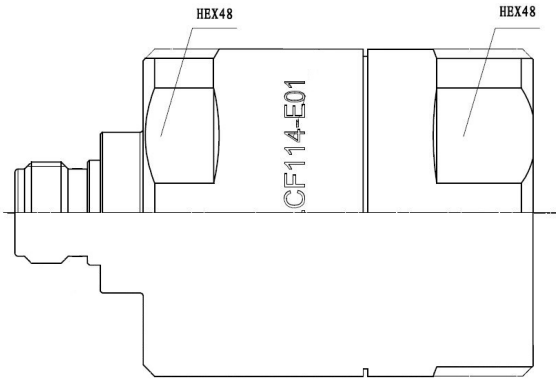

[External Document Links](#)
[Installation Instruction](#)

[Notes](#)