



**NMR-LCF14-D01**

**N Male Right Angle Connector for 1/4" Coaxial Cable, OMNI FIT™ Premium, O-Ring and compression sealing**

Radio Frequency Systems line of high performance coaxial cable connectors are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up the attachment of connectors to CELLFLEX® coaxial cables.

All RFS Technologies connectors are fully tested for mechanical and electrical compliance to industry specifications.



OMNI FIT™ Premium Connectors

The N connector meets all technical requirements and covers high frequencies as well as legacy applications. Sealing against outer conductor and jacket by means of O-Ring and 360° compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket.;

**FEATURES / BENEFITS**

- Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction
- Two-piece design i.e. visual inspection of interlocking leads to improved installation security
- OMNI FIT™ concept i.e. streamlined order management and reduced stock level
- Watertight sealing in mated and unmated condition, i.e. reduced efforts during installation and improved security during operation
- Unique NiTin plating i.e. extreme resistance against corrosion even under hardest climatic and environmental circumstances
- Multi-thread (Tristart) design i.e. simplified and accelerated tightening process
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis

**Technical features**

**GENERAL SPECIFICATIONS**

<b>Transmission Line Type</b>		Coaxial Cable
<b>Cable Size</b>		1/4
<b>Cable Type</b>		Foam Dielectric
<b>Model Series</b>		LCF12-50 Series, ICA12-50 Series, RCF12-50 Series
<b>Connector Interface</b>		N
<b>Connector Type</b>		OMNI FIT™ PREMIUM Right Angle
<b>Sealing Method</b>		O-Ring
<b>Gender</b>		Male

**ELECTRICAL SPECIFICATIONS**

<b>Nominal Impedance, ohms</b>	Ohm	50
<b>3rd Order IM Product @ 2x20 Watts</b>	dBc	-156 ; typical -162
<b>Maximum Frequency</b>	GHz	3.7
<b>VSWR, Return Loss</b>	VSWR (dB)	0 <math>\leq f \leq 1.0 \text{ GHz}</math>: 1.04 (34.1) 1.0 <math>\leq f \leq 2.0 \text{ GHz}</math>: 1.06 (30.7) 2.0 <math>\leq f \leq 2.7 \text{ GHz}</math>: 1.08 (28.3) 2.7 <math>\leq f \leq 3.7 \text{ GHz}</math>: 1.10 (26.4)

**NMR-LCF14-D01**

N Male Right Angle Connector for 1/4" Coaxial Cable, OMNI FIT™ Premium,  
O-Ring and compression sealing

**MECHANICAL SPECIFICATIONS**


Plating Outer/Inner		NiTin/Silver
Length	mm (in)	54 (2.13)
Outer Diameter	mm (in)	47.2 (1.86)
Inner Contact Attachment		Spring Finger
Outer Contact Attachment		360° clamping

**ACCESSORIES**

Wrench size front	mm (in)	22 (7/8)
Wrench size rear	mm (in)	18 (7/10)

**TESTING AND ENVIRONMENTAL**

Waterproof Level		IP68
------------------	--	------

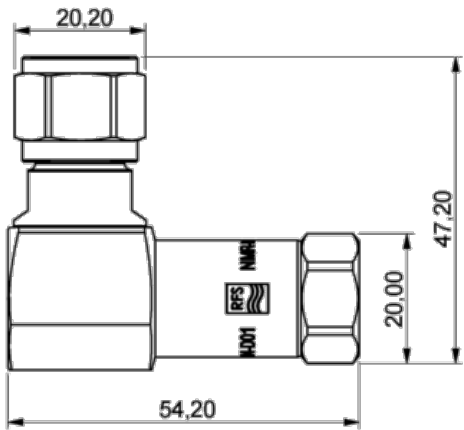

[External Document Links](#)  
[Installation Instruction](#)

[Notes](#)