




**RFS' HYBRIFLEX™** cabling solution for Remote Radio Unit (RRU) combines optical fiber and DC power in a single lightweight aluminum corrugated cable, making it the world's most innovative solution for RRU deployments. It was developed to reduce installation complexity and cost at Cellular sites.

**HYBRIFLEX™** cabling solutions allows mobile operators deploying RRU architecture to standardized installation process and eliminates the need for and the cost of cable grounding. The **HYBRIFLEX™** Power Connect cable **PW-S-08S4-J** consists of four unshielded pair DC wires protected by a corrugated Aluminum armor.

**FEATURES / BENEFITS**

- UV resistant jacket
- Comply with IEC 60228
- Flexible

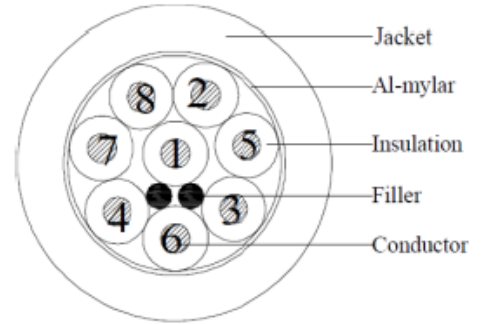

**Technical features**

**STRUCTURE**

Cable Type		HYBRIFLEX™ Power Cable
Size		5/8
Fire Performance		PE

**DC POWER CABLE SPECIFICATIONS**

Number of DC Pairs		4
Maximum DC-Resistance Power Cable	Ω/km (Ω/kft)	2.18 (0.66)
Cross Section of Power Cable	mm <sup>2</sup> (AWG)	8 (8)
Shielding		Corrugated Aluminium Armor
DC Wire Jacket Material		UV stable black PE
DC Wire Jacket Thickness	mm (in)	0.7 (0.028)
DC Cable Single Bending Radius	mm (in)	53 (2.1)
DC Cable Diameter	mm (in)	4.7 (0.18)
DC Cable Jacket		UV stable black PE
DC Standards (Meets or Exceeds)		IEC 60228

**MECHANICAL SPECIFICATIONS**

Cable Weight	kg/m (lb/ft)	0.79 (0.53)
Minimum Bending Radius, (Operating)	mm (in)	160 (6.3)
Minimum Bending Radius, (Installation)	mm (in)	220 (8.66)
Recommended / Maximum Clamp Spacing	m (ft)	0.8 / 1 (2 / 3.25)

**CABLE JACKET**

UV-Protection Individual and External Jacket		Yes
Jacket Material		UV stable black PE
Outer Diameter Nominal	mm (in)	20.85 (0.82)



**ARMOR SPECIFICATIONS**

<b>Armor Type</b>		Corrugated aluminium armor
-------------------	--	----------------------------

**F/O CABLE SPECIFICATIONS**

<b>F/O Cable Type</b>		HYBRIFLEX™ Power Cable
-----------------------	--	------------------------

<b>Cable Diameter mm (in)</b>		4.7 (0.18)
-------------------------------	--	------------

**TESTING AND ENVIRONMENTAL**

<b>Storage Temperature</b>	°C (°F)	-40 to 85 (-40 to 185 )
----------------------------	---------	-------------------------

<b>Operation Temperature</b>	°C (°F)	-40 to 85 (-40 to 185 )
------------------------------	---------	-------------------------

<b>Installation Temperature</b>	°C (°F)	-20 to 50 (-4 to 122 )
---------------------------------	---------	------------------------

[External Document Links](#)

[Notes](#)