




**FEATURES / BENEFITS**

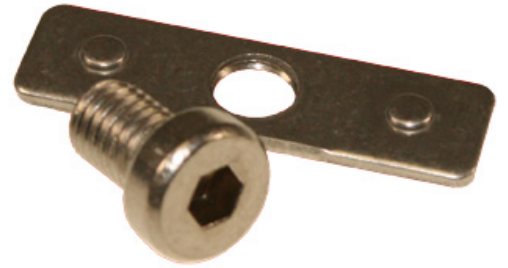

**Technical features**

**GENERAL SPECIFICATIONS**

|                               |  |   |
|-------------------------------|--|---|
| <b>Product Line</b>           |  | Coaxial Cable Accessories<br>Hybrid Cable Accessories |
| <b>Product Type</b>           |  | Hanger Accessories                                    |
| <b>Hanger Type</b>            |  | Rucksack cover plate (without RSB-Clip)               |
| <b>Transmission Line Type</b> |  | LCF12<br>LCF14<br>LCF38<br>SCF38                      |
| <b>Cable Type</b>             |  | Coaxial Foam Dielectric                               |

**MECHANICAL SPECIFICATIONS**

|   |  |  |
|---|--|--|
| <b>Cable Size</b>                       |  | 1/2  |
| <b>Number of Cable / Waveguide Runs</b> |  | 1 per layer, can be stacked up to 2 layers |
| <b>Material</b>                         |  | Stainless Steel                            |
| <b>Mounting Screw</b>                   |  | M8   |

**TEMPERATURE SPECIFICATIONS**

|                                 |         |                         |
|---------------------------------|---------|-------------------------|
| <b>Installation Temperature</b> | °C (°F) | -50 to 85 (-58 to 185 ) |
| <b>Operation Temperature</b>    | °C (°F) | -50 to 85 (-58 to 185 ) |

**PACKAGING INFORMATION**

|                         |  |    |
|-------------------------|--|----|
| <b>Package Quantity</b> |  | 10 |
|-------------------------|--|----|

**External Document Links**

**Notes**

Only usable in combination with RSB-12, RSB-14 & RSB-S38/L14.