


The set consists of a clamping plate made of aluminium, a stainless steel reinforcement plate and a M6 stainless steel socket head screw. **FEATURES / BENEFITS**

Technical features

		Coaxial Cable Accessories
roduct Line		
		Elliptical Waveguide Accessories
roduct Type		Hanger
anger Type		RSB clamping plate for anchor bar
nstallation Hardware Type		Anchor bar with slotwidth 18 to 22 mm (0.7 to 0.9 inch)
able Type		Coaxial Foam Dielectric
IECHANICAL SPECIFICATIONS		
umber of Cable / Waveguide		1
uns		I
Material		Clamping plate: Aluminium
		Reinforcement plate: Stainless steel
		Screw: Stainless steel
MPERATURE SPECIFICATIONS		
stallation Temperature	°C (°F)	-50 to 85 (-58 to 185)
peration Temperature	°C (°F)	-50 to 85 (-58 to 185)
orage Temperature	°C (°F)	-50 to 85 (-58 to 185)
ACKAGING INFORMATION		
ackage Quantity		1

RSB-315



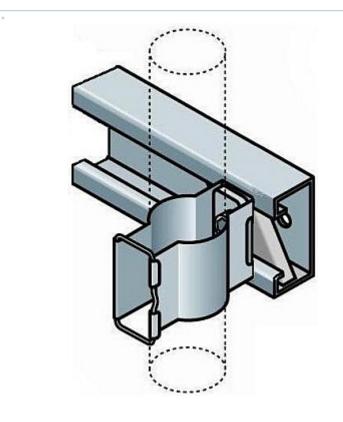

External Document Links

Notes

Only usable in combination with RSB-12, RSB-78, RSB-114 & RSB-158.