



The screw fixes the clic clamp and the round base to the wall.

FEATURES / BENEFITS

Stainless steel, for plastic clic clamp with round base RB 80-4 and plastic plug plug-6-1



Technical features

STRUCTURE


|                            |  |  |      |        |        |
|----------------------------|--|--|------|--------|--------|
| Product Line               |  | Radiating Cable Accessories  |      |        |        |
| Product Type               |  | Installation Hardware  |      |        |        |
| Installation Hardware Type |  | Screw  |      |        |        |
| Transmission Line Type     |  | RADIAFLEX® cable with copper foil as outer conductor, all sizes, cable type RLK, RLV and RAY |      |        |        |
| Coaxial Cable Type         |  | Radiating Cable  |      |        |        |
| Cable Size                 |  | 1/2"   | 7/8" | 1-1/4" | 1-5/8" |
| Configuration              |  | Screw for Clic clamp   |      |        |        |

MECHANICAL SPECIFICATIONS

|                             |         |                     |  |  |  |
|-----------------------------|---------|---------------------|--|--|--|
| Angle member adpter threads |         | 4.5mm               |  |  |  |
| Material                    |         | Stainless Steel, A4 |  |  |  |
| Thread                      | mm (in) | 4.5mm               |  |  |  |
| Length                      | mm (in) | 125 (4.92)          |  |  |  |

TEMPERATURE SPECIFICATIONS

|                          |         |                         |  |  |  |
|--------------------------|---------|-------------------------|--|--|--|
| Installation Temperature | °C (°F) | -50 to 85 (-58 to 185 ) |  |  |  |
| Operation Temperature    | °C (°F) | -50 to 85 (-58 to 185 ) |  |  |  |
| Storage Temperature      | °C (°F) | -50 to 85 (-58 to 185 ) |  |  |  |

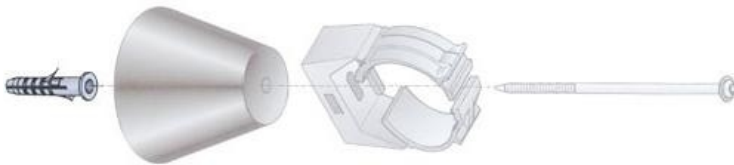

External Document Links

Notes