




Contact Shim for PBR120

**FEATURES / BENEFITS**

Waveguide installation

- The shim offers pressure tightness between two gasket sealed flanges
- The shim offers maximum possible RF contact.

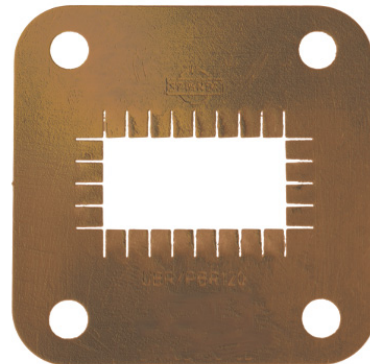

**Technical features**

**STRUCTURE**

Type of Rectangular Waveguide Component		Contact Shim
Waveguide Size IEC (EIA)		R120 (WR75)
Flange		UBR120
Flange Finish		un-plated
Package Quantity		1

**ELECTRICAL SPECIFICATIONS**

Frequency Range	GHz	9.84 - 15
Minimum Return Loss (max. VSWR)	dB (VSWR)	46.1 (1.01)

**MATERIAL**

Material		Copper beryllium
----------	--	------------------

[External Document Links](#)

[Notes](#)