PRODUCT DATASHEET

716F-HCA158-001

7-16 DIN Female Connector for 1-5/8" Coaxial Cable, Sealing compound

These high performance coaxial cable connectors are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up the attachment of connectors to coaxial cables. RFS Technologies connectors are fully tested for mechanical and electrical compliance specifications. They are available in all popular cable sizes in a variety of mating interfaces. The 7-16 connector is the most rugged RF connection meeting all requirements even under severe environmental conditions.

FEATURES / BENEFITS

- Excellent gas tightness, Overpressure for increased voltage handling is maintained throughout the system
- Robust Mechanical Design, Superior and consistent performance guarantees outstanding system characteristics.
- Extremely low reflection factor, Outstanding low reflection factor improves overall system performance and margin and reduces mismatch losses
- Totally Waterproof according to IP 68, Assures safe, long term operation in the harshest of environments. System tightness doesn't have to rely on overpressure from dehydration equipment.



Connector 7-16 socket CAF

Technical features

GENERAL SPECIFICATIONS

Transmission Line Type		Coaxial Cable
Cable Size		1-5/8"
Cable Type		Air Dielectric
Model Series		HCA158-50 Series
Connector Interface		7-16 DIN
Connector Type		RAPID FIT™
Sealing Method		Sealing compound [1])
Gender		Female

MECHANICAL SPECIFICATIONS

Plating Outer/Inner		Silver/Silver
Length	mm (in)	146 (5.75)
Outer Diameter	mm (in)	74 (2.91)
Weight	kg (lb)	1.5 (3.3)
Inner Contact Attachment		Spring Finger
Outer Contact Attachment		Threaded


ACCESSORIES

Wrench size front	mm (in)	36 (1-7/16)
Wrench size rear	mm (in)	32 (1-1/4)

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

716F-HCA158-001

7-16 DIN Female Connector for 1-5/8" Coaxial Cable, Sealing compound

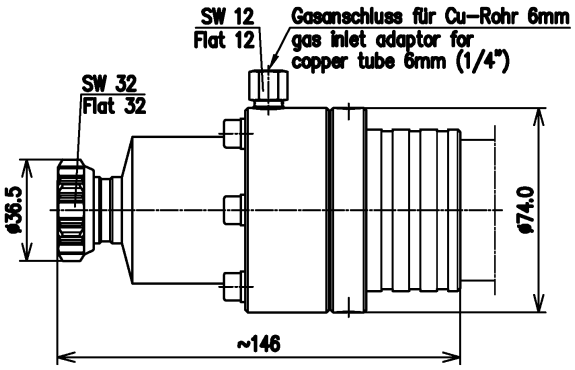

External Document Links

Installation Instruction

Notes

[1]) The sealing compound must be ordered separately.

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering