PRODUCT DATASHEET

COLD-101-BK

Cold shrink tube, 7-16 to Antenna; 4.3-10 to Antenna

RFS Technologies cold shrink tubes provide a additional sealing of feeder and antenna connections.
Waterproof IPX8
The materials are selected for a long-term outdoor use.

FEATURES / BENEFITS

- RFS Technologies offers a timesaving and easy way to secure a waterproof protection.
- No tools are necessary for installation.
- The shrinking process is done by simply unwinding a removable core.



External Document Links

Notes

Technical features

STRUCTURE

Product Line		Coaxial Cable Accessories
Product Type		Weather Seal Kit
Coaxial Cable Type		Foam Dielectric

MECHANICAL SPECIFICATIONS

Mated to Cable Size and Interface		7-16 to Antenna and 4.3-10 to Antenna for cables until 1/2"
Color		Black
Material		High elastic silicone rubber tube structure with mastic built-in, dual layers design can bring double guarantee of weatherproofing protection
Sealing Class		IPX8
Length	mm (in)	140 (5.51)
Diameter	mm (in)	40 (1.57)


TEMPERATURE SPECIFICATIONS

Operation Temperature, °C°F)	°C(°F)	-50 to 100 (-58 to 212)
Storage Temperature	°C(°F)	-50 to 100 (-58 to 212)


PACKAGING INFORMATION

Package Quantity		1

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

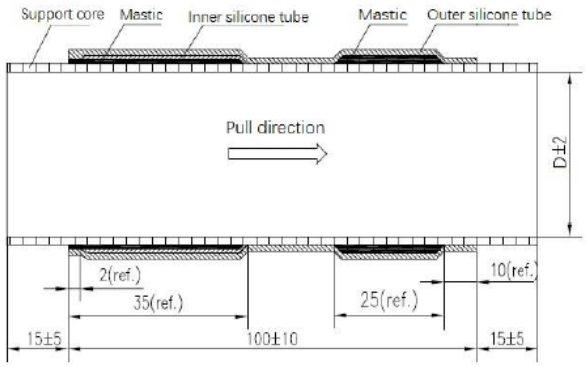

Picture 1. Dimension before shrink

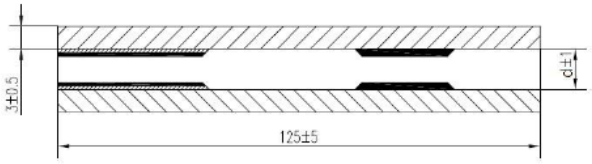

Picture 2. Dimension after shrink

Dimension	Diameter before shrink(D)	Length before shrink	Diameter after shrink(d)	Length after shrink	Thickness after shrink
Φ28-125	28±2	130±10	8.5±1	125±5	3±0.5
Φ40-125	40±2	130±10	11.5±1	125±5	3±0.5
					Unit: mm

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering