




6-1/8" low loss air dielectric cable

FEATURES / BENEFITS

- **Low Attenuation**  
The low attenuation of air dielectric coaxial cable results in highly efficient signal transfer in your RF system.
- **Complete Shielding**  
The solid outer conductor of air dielectric coaxial cable creates a continuous RFI/EMI shield that minimizes system interference.
- **Low VSWR**  
Special low VSWR versions of air dielectric coaxial cables contribute to low system noise.
- **Outstanding Intermodulation Performance**  
Air dielectric coaxial cable's solid inner and outer conductors virtually eliminate intermods. Intermodulation performance is also confirmed with state-of-the-art equipment at the RFS Technologies factory.
- **High Power Rating**  
Due to their low attenuation, outstanding heat transfer properties and temperature stabilized dielectric materials, air dielectric coaxial cable provides safe long term operating life at high transmit power levels.
- **Wide Range of Application**  
Typical areas of application are: feedlines for broadcast and terrestrial microwave antennas, wireless cellular, PCS and ESMR base stations, cabling of antenna arrays, and radio equipment interconnects.

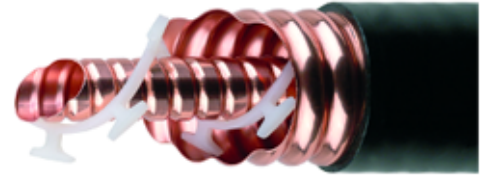

6 1/8" Air Dielectric Coaxial Cable

Technical features

APPLICATIONS

Applications		TV & Radio	HF Defense	Cable Solutions
--------------	--	------------	------------	-----------------

STRUCTURE

Size		6-1/8
Jacket Option		Black
Inner Conductor Diameter	mm (in)	67 (2.63)
Inner Conductor Material		Corrugated Copper Tube
Dielectric Diameter	mm (in)	147 (5.78)
Dielectric Material		Helical Polyethylene Spacer
Outer Conductor Diameter	mm (in)	162 (6.37)
Outer Conductor Material		Corrugated Copper
Jacket Diameter	mm (in)	169 (6.65)
Jacket Material		Polyethylene, PE
Cable Type		Air-Dielectric, Corrugated



**TESTING AND ENVIRONMENTAL**

<b>Fire Performance</b>		Halogene Free
<b>Flame Retardant Jacket Specifications</b>		Meets the requirements according to: IEC60754-1, IEC60754-2
<b>Installation Temperature</b>	°C(°F)	-40 to 60 (-40 to 140)
<b>Storage Temperature</b>	°C (°F)	-70 to 85 (-94 to 185)
<b>Operation Temperature</b>	°C(°F)	-50 to 85 (-58 to 185)

**ELECTRICAL SPECIFICATIONS**

<b>Impedance</b>	Ω	50 +/- 0.5
<b>Maximum Frequency</b>	GHz	0.86
<b>Velocity</b>	%	97
<b>Capacitance</b>	pF/m (pF/ft)	69 (21)
<b>Inductance</b>	uH/m (uH/ft)	0.173 (0.053)
<b>Peak Power Rating</b>	kW	2890
<b>RF Peak Voltage</b>	Volts	17000
<b>Jacket Spark</b>	Volt RMS	8000
<b>Inner Conductor dc Resistance</b>	Ω/1000 m (Ω/1000 ft)	0.17 (0.052)
<b>Outer Conductor dc Resistance</b>	Ω/1000 m (Ω/1000 ft)	0.044 (0.013)
<b>Return Loss (VSWR) Performance</b>		Typical 20.8dB (1.2 VSWR) or better within the operation bands of most global frequency ranges. Premium also available. Contact factory for options in your specific frequency band.
<b>Phase Stabilized</b>		Phase stabilized and phase matched cables and assemblies are available upon request.
<b>Temperature &amp; Power</b>		Standard

**MECHANICAL SPECIFICATIONS**

<b>Cable Weight, Nominal</b>	kg/m (lb/ft)	10 (6.7)
<b>Minimum Bending Radius, Single Bend</b>	mm (in)	1000 (39)
<b>Minimum Bending Radius, Repeated Bends</b>	mm (in)	1500 (59)
<b>Bending Moment</b>	Nm (lb-ft)	1000 (738)
<b>Tensile Strength</b>	N (lb)	6000 (1349)
<b>Recommended / Maximum Clamp Spacing</b>	m (ft)	1 / 2 (3.3 / 6.6)



**ATTENUATION @ 20°C (68°F) AND POWER RATING @ 40°C (104°F)**

Frequency, MHz	dB per 100m	dB per 100ft	Power, kW
0.5	0.01	0.00	2500
1	0.02	0.01	1770
1.5	0.02	0.01	1440
2	0.03	0.01	1250
10	0.06	0.02	554
20	0.08	0.03	390
30	0.10	0.03	318
50	0.13	0.04	243
88	0.18	0.05	183
100	0.19	0.06	171
108	0.20	0.06	165
150	0.23	0.07	139
174	0.25	0.08	129
200	0.27	0.08	120
300	0.34	0.10	97
400	0.40	0.12	83.60
450	0.42	0.13	78.80
500	0.45	0.14	74.70
512	0.45	0.14	73.70
600	0.49	0.15	68.10
700	0.54	0.16	63
800	0.58	0.18	58.90
824	0.59	0.18	58.10
860	0.60	0.18	56.90

External Document Links

Notes