PRODUCT DATASHEET

I-ATO5-380/6000

Indoor Omnidirectional Antenna 380-6000 MHz

The omnidirectional antenna I-ATO5-380/6000 is designed for broadband in-building DAS applications supporting all kind of safety as well 4G/5G commercial wireless communication networks and WiFi/WLAN in all bands.
The antenna combines an aesthetical design with superior electrical characteristics notably a PIM optimized design to minimize network interferences.
The antenna is constructed from lightweight materials ideal for easy ceiling mounting. The low profile and off-white radome blends easily into most building aesthetics with minimum visual impact.



I-ATO5-380/6000

FEATURES / BENEFITS

- **Wideband omnidirectional antenna, supporting all wireless services in the frequency bands 380-520 / 698-960/ 1710-6000MHz**
- **Aesthetical visual appearance, compact and light weight**
- **Indoor distribution of saftey and commercial wireless services**
- **PIM optimized antenna design (up to 153dBc @2x20W)**
- **Easy installation, ceiling mounting**

Technical features

GENERAL SPECIFICATIONS

Product Type		Omnidirectional Antenna		
Techn. Application		Indoor		

MECHANICAL SPECIFICATIONS

Number of Input Ports		1		
Connectors		N female		
Connector Cable	mm (in)	300 (11.81)		
Mounting Hardware included		Ceiling, via hole		
Height (Less Connectors)	mm (in)	152 (6)		
Diameter (Less Connectors)	mm (in)	298 (11.7)		
Weight	kg (lb)	0.9 (1.98)		

ELECTRICAL SPECIFICATIONS

Frequenz	MHz	380-520	698-960	1710-6000
Gain	dBi	2.0 ± 1.0	2.5 ± 1.0	4.0 ± 1.0
Beamwidth, vertical, typ.	°	90	90	35
VSWR		2.5	2.0	2.0
Intermodulation (IM3) (2x20W)	dBc	/	153dBc	153dBc
Impedance, Ohm	Ω	50		
Polarization		Vertical		
Total Input Power max.	W	50		

MATERIAL

Radome Material		ABS
Radome Color		White (RAL 9003)

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering


TEMPERATURE SPECIFICATIONS


Operation Temperature	°C (°F)	-40 to 55 (-40 to 131)

TESTING AND ENVIRONMENTAL

Environmental Class		Indoor

800MHz

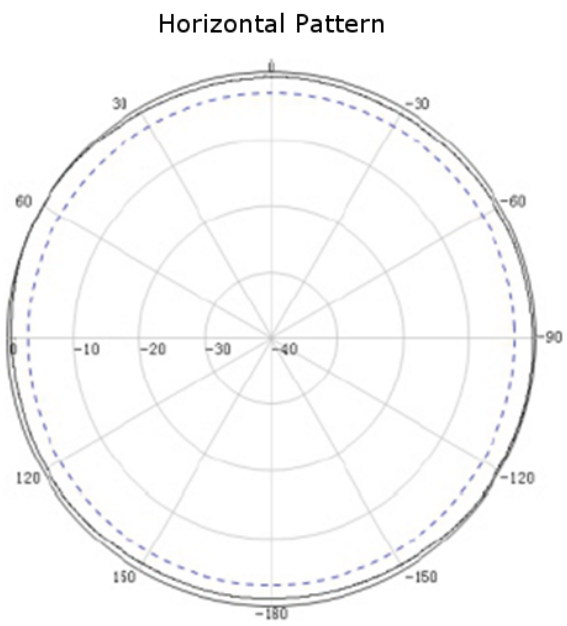


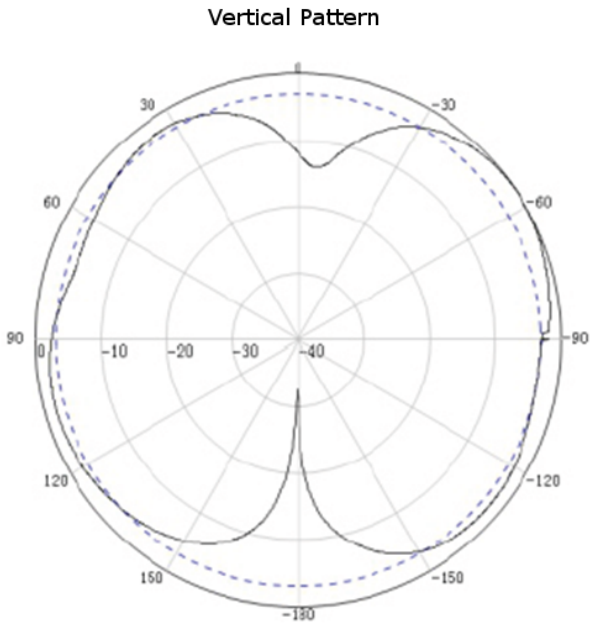


All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

1710MHz

Horizontal Pattern

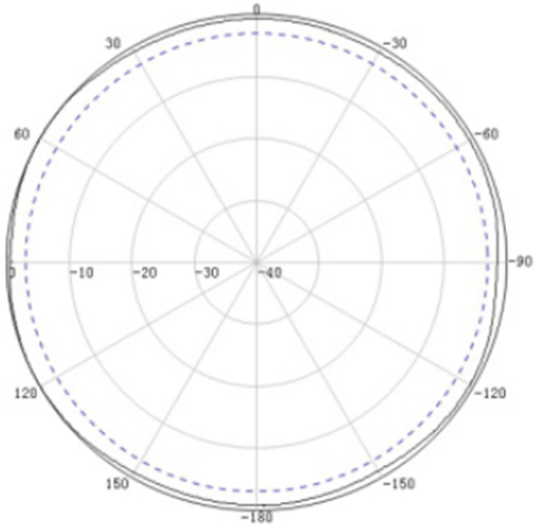


Vertical Pattern

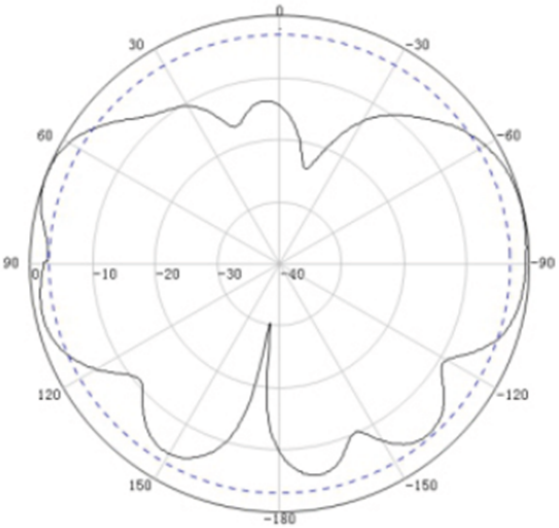


2500MHz

Horizontal Pattern

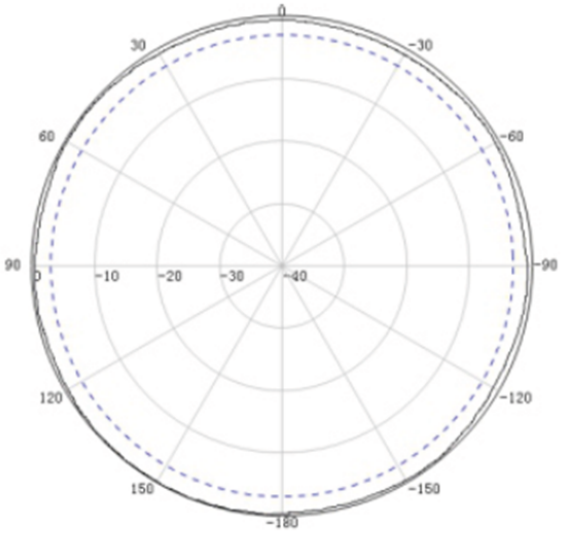

Vertical Pattern

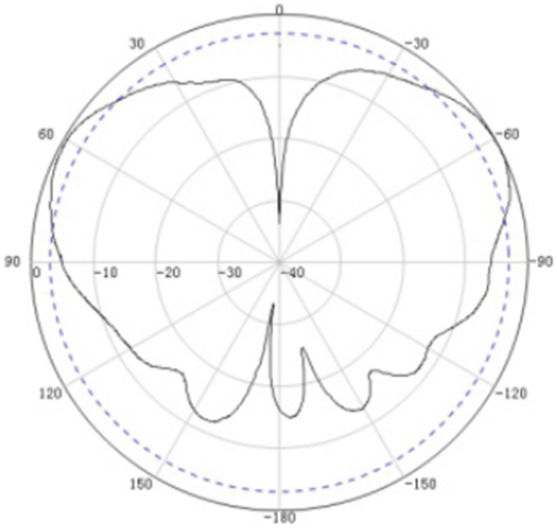

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

External Document Links

Notes

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering