




### NF-LCF14-E01

## N Female Connector for 1/4" Coaxial Cable, OMNI FIT™ Premium, Straight, O-Ring and compression sealing

Radio Frequency Systems line of high performance coaxial cable connectors are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up the attachment of connectors to CELLFLEX® coaxial cables.

All RFS Technologies connectors are fully tested for mechanical and electrical compliance to industry specifications.



OMNI FIT™ Premium Connectors

The N connector meets all technical requirements and covers high frequencies as well as legacy applications. Sealing against outer conductor and jacket by means of O-Ring and 360° compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket.;

#### FEATURES / BENEFITS

- Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction
- Two-piece design i.e. visual inspection of interlocking leads to improved installation security
- OMNI FIT™ concept i.e. streamlined order management and reduced stock level
- Watertight sealing in mated and unmated condition, i.e. reduced efforts during installation and improved security during operation
- Unique NiTin plating i.e. extreme resistance against corrosion even under hardest climatic and environmental circumstances
- Multi-thread (Tristart) design i.e. simplified and accelerated tightening process
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis

## Technical features

#### GENERAL SPECIFICATIONS

Transmission Line Type		Coaxial Cable
Cable Size		1/4
Cable Type		Foam Dielectric
Model Series		LCF14-50 Series
Connector Interface		N
Connector Type		OMNI FIT™ PREMIUM Straight
Sealing Method		O-Ring
Gender		Female

#### ELECTRICAL SPECIFICATIONS

Nominal Impedance, ohms	Ohm	50
3rd Order IM Product @ 2x20 Watts	dBc	-156 ; typical -162
Maximum Frequency	GHz	6
VSWR, Return Loss	VSWR (dB)	0 &lt; f ≤ 1.0 GHz: 1.02 (40) 1.0 &lt; f ≤ 2.2 GHz: 1.04 (34) 2.2 &lt; f ≤ 2.7 GHz: 1.04 (34) 2.7 &lt; f ≤ 3.8 GHz: 1.08 (28) 3.8 &lt; f ≤ 5.0 GHz: 1.17 (22) 5.0 &lt; f ≤ 6.0 GHz: 1.22 (20)



**NF-LCF14-E01**

N Female Connector for 1/4" Coaxial Cable, OMNI FIT™ Premium, Straight, O-Ring and compression sealing

**MECHANICAL SPECIFICATIONS**


<b>Plating Outer/Inner</b>		Tri metal alloy/Silver
<b>Length</b>	mm (in)	56 (2.205)
<b>Outer Diameter</b>	mm (in)	22 (0.866)
<b>Inner Contact Attachment</b>		Spring Finger
<b>Outer Contact Attachment</b>		360° clamping

**ACCESSORIES**

<b>Wrench size front</b>	mm (in)	20
<b>Wrench size rear</b>	mm (in)	20

**TESTING AND ENVIRONMENTAL**

<b>Waterproof Level</b>		IP68
-------------------------	--	------

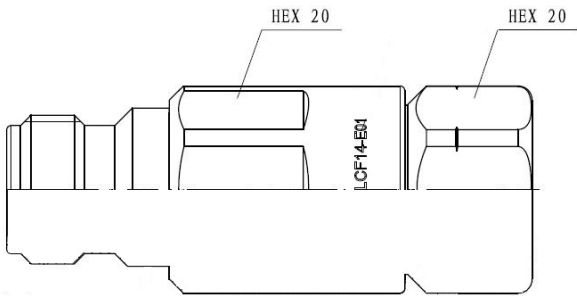

[External Document Links](#)  
[Installation Instruction](#)

[Notes](#)