PRODUCT DATASHEET

TER-43-3800-2W

Load, 4.3-10 male, 2 Watt

The 43-TER Series are coaxial loads which operate from DC up to 3.8 GHz.The products are ideally suited for termination of unused ports in distributed antenna systems or in RADIAFLEX® radiating cables systems.

NO IMAGE AVAILABLE

FEATURES / BENEFITS

- **Ideal for all kind of DAS applications**
- **Finned termination for optimized heat disspation**
- **Low VSWR**

Technical features

GENERAL SPECIFICATIONS

Product Type		Load
Techn. Application		Indoor

ELECTRICAL SPECIFICATIONS


Frequency Range	MHz	DC-3.800
Impedance	Ohm	50
Max. VSWR / Return Loss, dB	VSWR/dB	/19
Total Input Power	W	2

MECHANICAL SPECIFICATIONS

Input Connector Type		4.3-10 male
Diameter	mm (in)	18 (0.71)
Length	mm (in)	39 (1.53)

TEMPERATURE SPECIFICATIONS

Temperature Range	°C (°F)	-25 to 65 (-13 to 149)
Environmental Class		Indoor

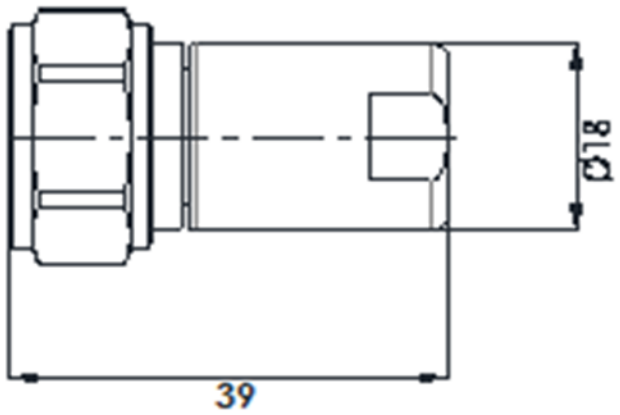

External Document Links

Notes

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

Derated power by -1.5%/°C above 50°C

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering